





i-mop[®] XXL plus

SCRUBBER

Parts Manual



(S/N 630000-)

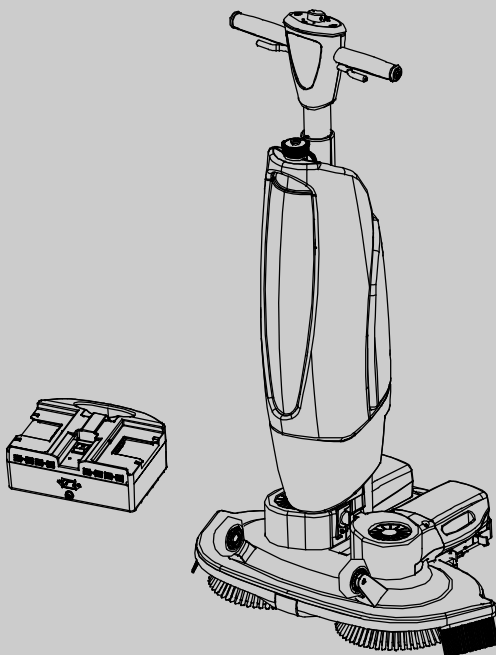

Model Part No.:

1251235 - i-mop XXL plus w/ charger & battery

9021099 - i-mop XXL plus w/ charger & extra battery

1250527 - i-charge 2 battery charger

North America / International




For the latest Parts manuals and other
language Operator manuals, visit:

www.tennantco.com/manuals

9020955

Rev. 03 (07-2024)



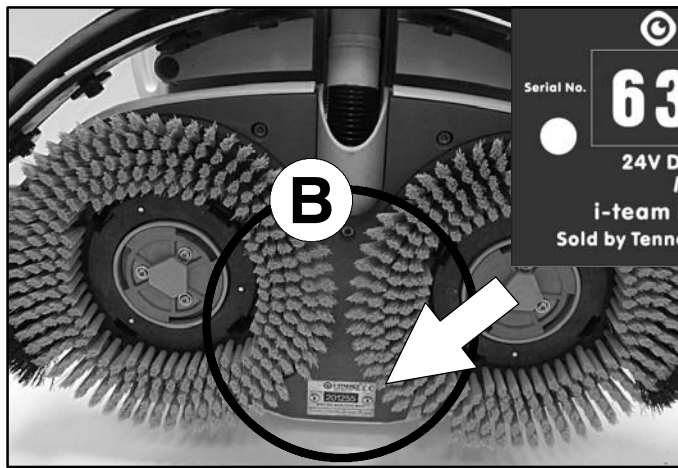

Note: A second serial number label is also located on the handle stem.

Ref	Part No.	Serial Number	Description	Qty.
1	82681	(000000-)	Bracket Wldt, Lpg Mount	1
2	63810	(000000-)	Latch Assy, Lpg Tank Mtg, W/Nut	4
3	51839	(000000-)	Nut Adjustable, Lpg Tank Mtg	2
4	49263	(000000-)	Tie, Cable	3
D	82556	(000000- 001039)	Bracket, Vaporizer	1
	54930	(000000-)	Vaporizer, LPG	1

HOW TO ORDER PARTS - See diagram above

Only use TENNANT Company supplied or equivalent parts. Parts and supplies may be ordered online, by phone, by fax or by mail.

Follow the steps below to ensure prompt delivery.

1. (A) Identify the machine model.
2. (B) Identify the machine serial number from the data label.
3. (C) Ensure the proper serial number is used from the parts list.
4. Identify the part number and quantity.
Do not order by page or reference numbers.
5. Provide your name, company name, customer ID number, billing and shipping address, phone number and purchase order number.
6. Provide detail shipping instructions.

- (D) ▽ - identifies an assembly
▲ - identifies parts included in assembly

Please fill out at time of installation for future reference.

Model No. - _____
 Serial No. - _____
 Machine Options - _____
 Sales Rep. - _____
 Sales Rep. phone no. - _____
 Customer ID Number - _____
 Installation Date - _____

Tennant Company

10400 Clean Street
 Eden Prairie, MN 55344-2650 USA
 Phone: (800) 553-8033
 www.tennantco.com

Specifications and parts are subject to change without notice.

Copyright © 2024 TENNANT Company, Printed in U.S.A.

STANDARD PARTS


RECOMMENDED SPARE PARTS LIST	5
HANDLE ASSEMBLY	6
HANDLE ASSEMBLY - CONT'D	8
CONTROL CONSOLE ASSEMBLY	10
CLEAN WATER TANK ASSEMBLY	12
DIRTY WATER TANK ASSEMBLY	14
SCRUB HEAD ASSEMBLY	16
BRUSH MOTOR ASSEMBLY	18
BRUSH DRIVER ASSEMBLY	20
PAD DRIVER ASSEMBLY	22
SQUEEGEE ASSEMBLY	24
MAIN LEVER ASSEMBLY	26
BATTERY PACK ASSEMBLY	28
BATTERY CHARGER ASSEMBLY	30
WALL CHARGERS (OPTION)	32
ELECTRICAL DIAGRAM	34

RECOMMENDED SPARE PARTS LIST

Part No.	Serial Number	Description	Qty.
1237713	(630000-	) Brush, Med, Blu, 11.8 [Xxl Qty 2] (Standard - Medium Duty Daily Scrubbing)	1
1237714	(630000-	) Brush, Soft, Lt Blu, 11.8 [Xxl Qty 2] (Option - Soft Light Duty Cleaning)	1
1237715	(630000-	) Brush, Hard, Red, 11.8 [Xxl Qty 2] (Option - Heavy Duty Deep Cleaning & Grout)	1
1237716	(630000-	) Driver Assy, Pad, Blu, 11.7 [Xxl Qty 2]	1
1237718	(630000-	) Pad, Red, 10.6 [Xxl Box Of 10] (Cleaning)	1
1237717	(630000-	) Pad, White, 10.6 [Xxl Box Of 10] (Buffing)	1
1237719	(630000-	) Pad, Green, 10.6 [Xxl Box Of 10] (Scrubbing)	1
1237720	(630000-	) Pad, Blu, 10.6 [Xxl Box Of 10] (Scrubbing)	1
1237721	(630000-	) Pad, Black, 10.6 [Xxl Box Of 10] (Light Stripping)	1
1237725	(630000-	) Pad, Green, 10.6 [Xxl Twister Qty 2] (Diamond Polishing Pad - Daily Cleaning)	1
1237722	(630000-	) Pad, Yellow, 10.6 [Xxl Twister Qty 2] (Diamond Polishing Pad - Periodic Cleaning)	1
1237726	(630000-	) Pad, White, 10.6 [Xxl Twister Qty 2] (Diamond Polishing Pad - Deep Cleaning)	1
1237727	(630000-	) Pad, Red, 10.6 [Xxl Twister Qty 2] (Diamond Polishing Pad - Deep Cleaning Aggressive)	1
1237723	(630000-	) Pad, Orange, 10.6 [Xxl Twister Qty 2] (Diamond Polishing Pad - Ceramic Tiles)	1
1237724	(630000-	) Pad, Blu, 10.6 [Xxl Twister Qty 2] (Diamond Polishing Pad - High Traffic Areas)	1
1237729	(630000-	) Blade, Sqge, Front 27.3 [Xxl Lina] (Standard - Red Linatex)	1
1237731	(630000-	) Blade, Sqge, Frnt, 27.3 [Xxl Ure] (Option)	1
1237730	(630000-	) Blade, Sqge, Rear, 28.7 [Xxl Lina] (Standard - Red Linatex)	1
1237732	(630000-	) Blade, Sqge, Rear, 28.7 [Xxl Ure] (Option)	1
1237747	(630000-	) Motor, Brush, Rh [Xxl]	1
1237746	(630000-	) Motor, Brush, Lh [Xxl]	1
1255496	(630000-	) Circuitboard Kit, W/Hardware [Imop Xxl] (Includes Decal and Water Save Button)	1
1252648	(630000-	) Valve Asm, Complete, w/ wire connector [Xl & Xxl] (Includes Fixation Plate and Mounting Screws)	1
1232481	(630000-	) Connector Assy, Upt, Sigar (Includes Clip and Mounting Screw)	1
1232673	(630000-	) Caster Assy, Sqge (Includes Qty 3 Caster Assemblies And Retaining Assemblies)	3
▽	1255493	(630000-) Fan Kit, Vac [Imop Xl & Xxl & Plus] (Vac Motor Leads Not Included - Order Kit 1246373)	1
▲	1246375	(630000-) Gasket Set, Motor, Vacuum [Xl & Xxl]	1
	1232675	(630000-) Cover, Brush, Motor (Includes Qty 2 Cover Assemblies)	1
	1237750	(630000-) Hinge Kit, [Xxl]	1
	1237742	(630000-) Transport Kit, Caster, Rh [Xxl]	1
	1237741	(630000-) Transport Kit, Caster, Lh [Xxl]	1
	1232676	(630000-) Clip, Retaining, Tank (Includes Qty 2 Clip Assemblies)	1
	1232519	(630000-) Coupling, Water	1
	1232677	(630000-) Connector, Hose, Sqge	1
	1237790	(630000-) Knob Kit, Housing, Top [Xxl]	1
	1232587	(630000-) Hose Assy, Stretch	1
	1251765	(630000-) Float Asm, Ball [xl & xxl plus imop]	1
	1246485	(330000-) Grip, Handle [Set Of 2 Xxl Imop]	1
	1237733	(630000-) Battery Kit, [Xxl I- Mop Left & Right]	1
	1250527	(330000-) Charger, Bat (Plus Model 3pin)	1

HANDLE ASSEMBLY

355678

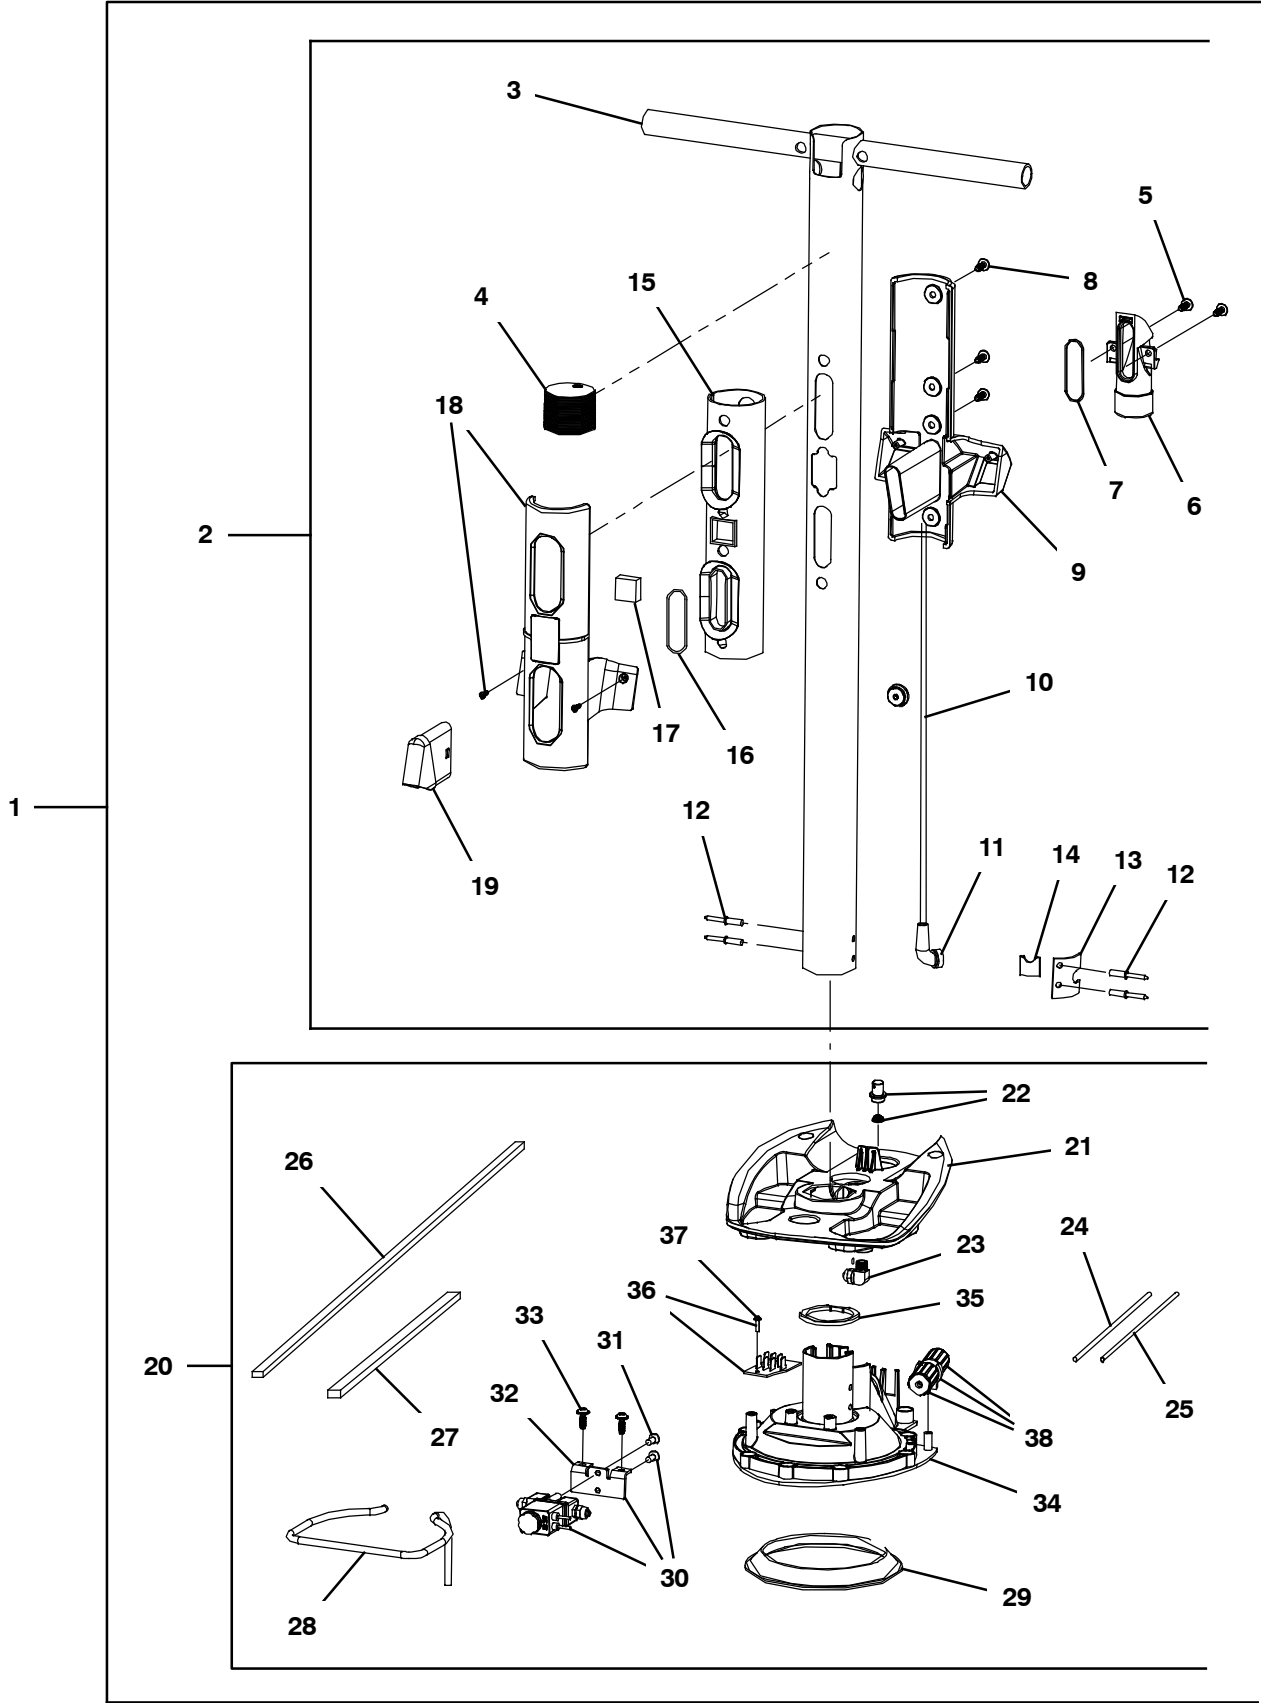

HANDLE ASSEMBLY

Ref.	Part No.	Serial Number	Description	Qty.
▽	1	1237758	(630000-) Tube Assy, Inlet [Xxl] (Entire Assy Includes Items #2- 38)	1
	2	1237792	(630000-) Tube Kit, Inlet [Xxl] (Includes Items #2- 19 Only)	1
		1246354	(630000-) Handle Asm, Weldment [Xxl Imop]	1
▲▽				
▲▲	3	1237800	(630000-) Handle Wldt, Tube [xl&Xxl]	1
▲▲	4	N/A	(630000-) End Cap Inlet Tube	1
▲	5	N/A	(630000-) Screw Wn 5451 25x10 Ejot Delta Pt	2
▲	6	1234958	(630000-) Connector, Hose, Squeegee [Imop]	1
▲	7	N/A	(630000-) Gasket For Hose Connector	1
▲▽		1246357	(630000-) Holder, Tank, Rear [XI & Xxl Imop]	1
▲▲	8	N/A	(630000-) Screw Wn 5451 50x25 Ejot Delta Pt	10
▲▲	9	N/A	(630000-) Tank Holder Rear	1
▲▽		1246358	(630000-) Tube, Cable, Utp [XI & Xxl Imop]	1
▲▲	10	1232494	(630000-) Cable, Connector, Cntrl [Utp]	1
▲▲	11	N/A	(630000-) Power Cable Guiding Rubber	1
▲▲	12	N/A	(630000-) Rivet With Dia. 5mm & Length 10mm	4
▲▲	13	N/A	(630000-) Sealing Pressure Plate	1
▲▲	14	N/A	(630000-) Sealing Rubber Sheet Al Tube	1
▲▽		1246360	(630000-) Seal Kit, Compartment, Dirt [XI & Xxl]	1
▲▲	15	1234957	(630000-) Seal, Tank, Recvy [Imop]	1
▲▲	16	N/A	(630000-) O- ring Wire Dia. 3mm, Od 46mm	1
▲▲	17	N/A	(630000-) Magnet Top Unit Small 20x20x10mm	1
▲	18	1246366	(630000-) Holder, Tank, Front [XI & Xxl Imop]	1
▲	19	1234953	(630000-) Deflector, Tank, Recvy [Imop]	1
▽	20	1232710	(630000-) Motor Kit, Top	1
▲▽	21	1246367	(630000-) Motor Hsg, Unit, Top [XI & Xxl] (Includes Water Inlet Coupling & Metal Grease Filter)	1
▲▲	22	1261821	(330000-) Fitting Kit, Coupling, W/Washer [Imop]	1
▲	23	1246369	(630000-) Connector, Metal, Angle [XI & Xxl Imop]	1
▲▽		1246373	(630000-) Wire, Terminal, Motor [XI & Xxl Imop] (Vac Motor Leads)	1
▲▲	24	N/A	(630000-) 187 Terminal + Wire 14awg Red, L=280mm 250 Terminal	1
▲▲	25	N/A	(630000-) 187 Terminal + Wire 14awg Blk, L=280mm 250 Terminal	1
▲▽		1246370	(630000-) Gasket Set, Sealing, Motr [XI & Xxl Imop]	1
▲▲	26	N/A	(630000-) Sealing Gasket Eva 3x1.5x593mm	1
▲▲	27	N/A	(630000-) Sealing Gasket Eva 4x2.5x150mm	1
▲	28	N/A	(630000-) Water Channel Dia. 6mm L:225mm	1
▲	29	N/A	(630000-) Vacuum Motor Sealing Top	1
▽	30	1252648	(630000-) Valve Asm, Complete, w/ connectors [XI & Xxl]	1
▲▲	31	1234975	(630000-) Screw, Flt, Soc, M4 X 10 Ss [10x, Imop]	2
▲▲	32	N/A	(630000-) Megnetic Ventil Fixation Plate Stainless Steel	1
▲▽		1246374	(630000-) Connector Kit, Motor, Vacuum [XI & Xxl] (Includes Items #33- 37)	1
▲▲	33	N/A	(630000-) Screw M3x12 Crosshead Selftapping Bl- ni Sst	2
▲▲	34	N/A	(630000-) Motor Unit Frame	1
▲▲	35	N/A	(630000-) Motor Unit Frame Rubber	1
▲	36	1232486	(630000-) Circuitboard, Valve (Includes Item #37) (Not Inlcuded In Assy P/N 1232710 Item #20)	1
▲	37	N/A	(630000-) Screw M3x12 Crosshead Selftapping Bl- ni Sst	2
▲	38	1232481	(630000-) Connector Assy, Upt, Sigar (Includes Clip and Mounting Screw) (Not Inlcuded In Assy P/N 1232710 Item #20)	1


▽ ASSEMBLY

▲ INCLUDED IN ASSEMBLY

N/A = NOT AVAILABLE SEPARATELY - MUST ORDER ASSEMBLY (▽)

HANDLE ASSEMBLY - CONT'D

355679

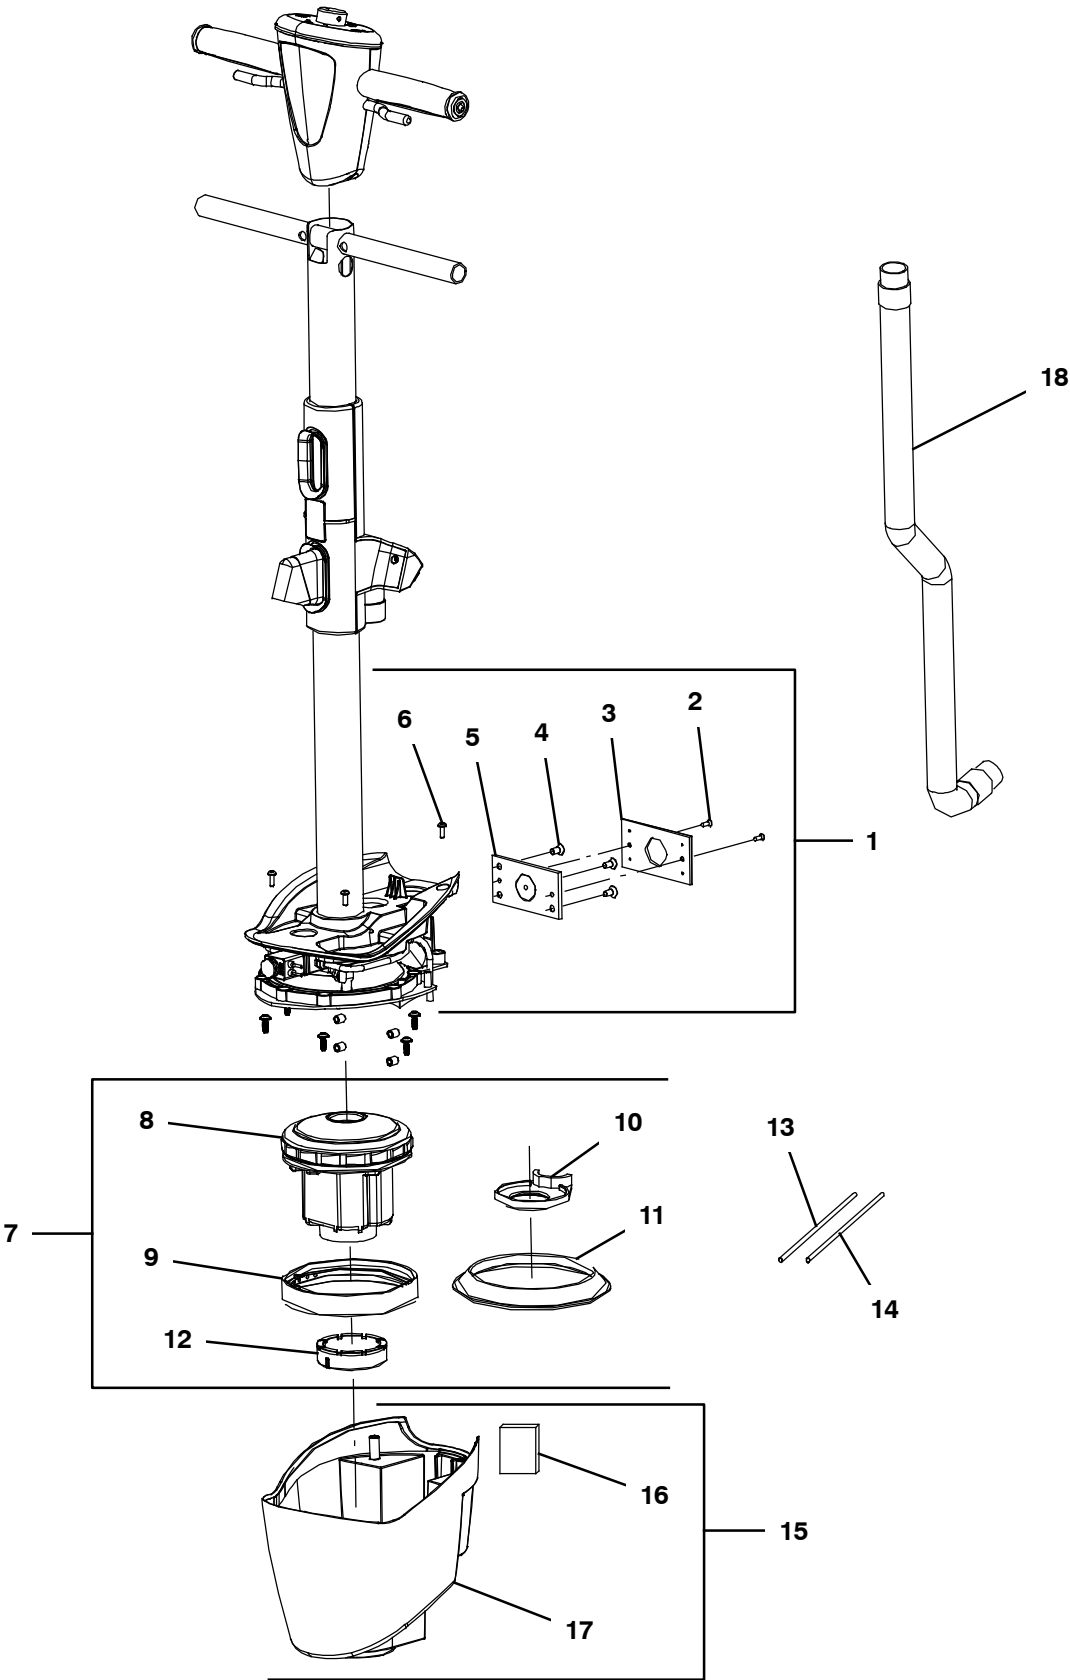

HANDLE ASSEMBLY - CONT'D

	Ref.	Part No.	Serial Number	Description	Qty.
▽	1	1232694	(330000-	) Hinge Kit, Lever	1
▲	2	N/A	(330000-	) Count Sunk Screw N3.5x13 Philips Head	2
▲	3	N/A	(330000-	) Plastic Plate For Hinge Welding Assy	1
▲	4	1234974	(330000-	) Screw, Flt, Soc, M6 X 12 NI [10x, Imop]	4
▲	5	N/A	(330000-	) Hinge Welding Assy Top Unit	1
▲	6	N/A	(330000-	) Screw M4x12	4
▽	7	1255493	(330000-	) Fan Kit, Vac [Imop XI & Xxl & Plus] (Vac Motor Leads Not Included - Order Kit 1246373)	1
▲	8	N/A	(330000-	) Domel Vacuum Cleaner Motor	1
▲	9	N/A	(330000-	) Vac Motor Sealing Support	1
▲	10	N/A	(330000-	) Vac Motor Sealing Bottom	1
▲▽		1246375	(330000-	) Gasket Set, Motor, Vacuum [XI & Xxl]	1
▲▲	11	N/A	(330000-	) Center Sealing Gasket Top Vacuum Motor	1
▲▲	12	N/A	(330000-	) Vacuum Motor Sealing Top	1
▽		1246373	(330000-	) Wire, Terminal, Motor [XI & Xxl Imop] (Vac Motor Leads)	1
▲	13	N/A	(330000-	) 187 Terminal + Wire 14awg Red, L=280mm 250 Terminal	1
▲	14	N/A	(330000-	) 187 Terminal + Wire 14awg Blk, L=280mm 250 Terminal	1
▽	15	1232711	(330000-	) Cover Kit, Fan	1
▲	16	N/A	(330000-	) Magnet Top Unit	1
▲	17	N/A	(330000-	) Motor Unit Cover	1
	18	1232587	(330000-	) Hose Assy, Stretch	1


▽ ASSEMBLY

▲ INCLUDED IN ASSEMBLY

N/A = NOT AVAILABLE SEPARATELY - MUST ORDER ASSEMBLY (▽)

CONTROL CONSOLE ASSEMBLY

355672

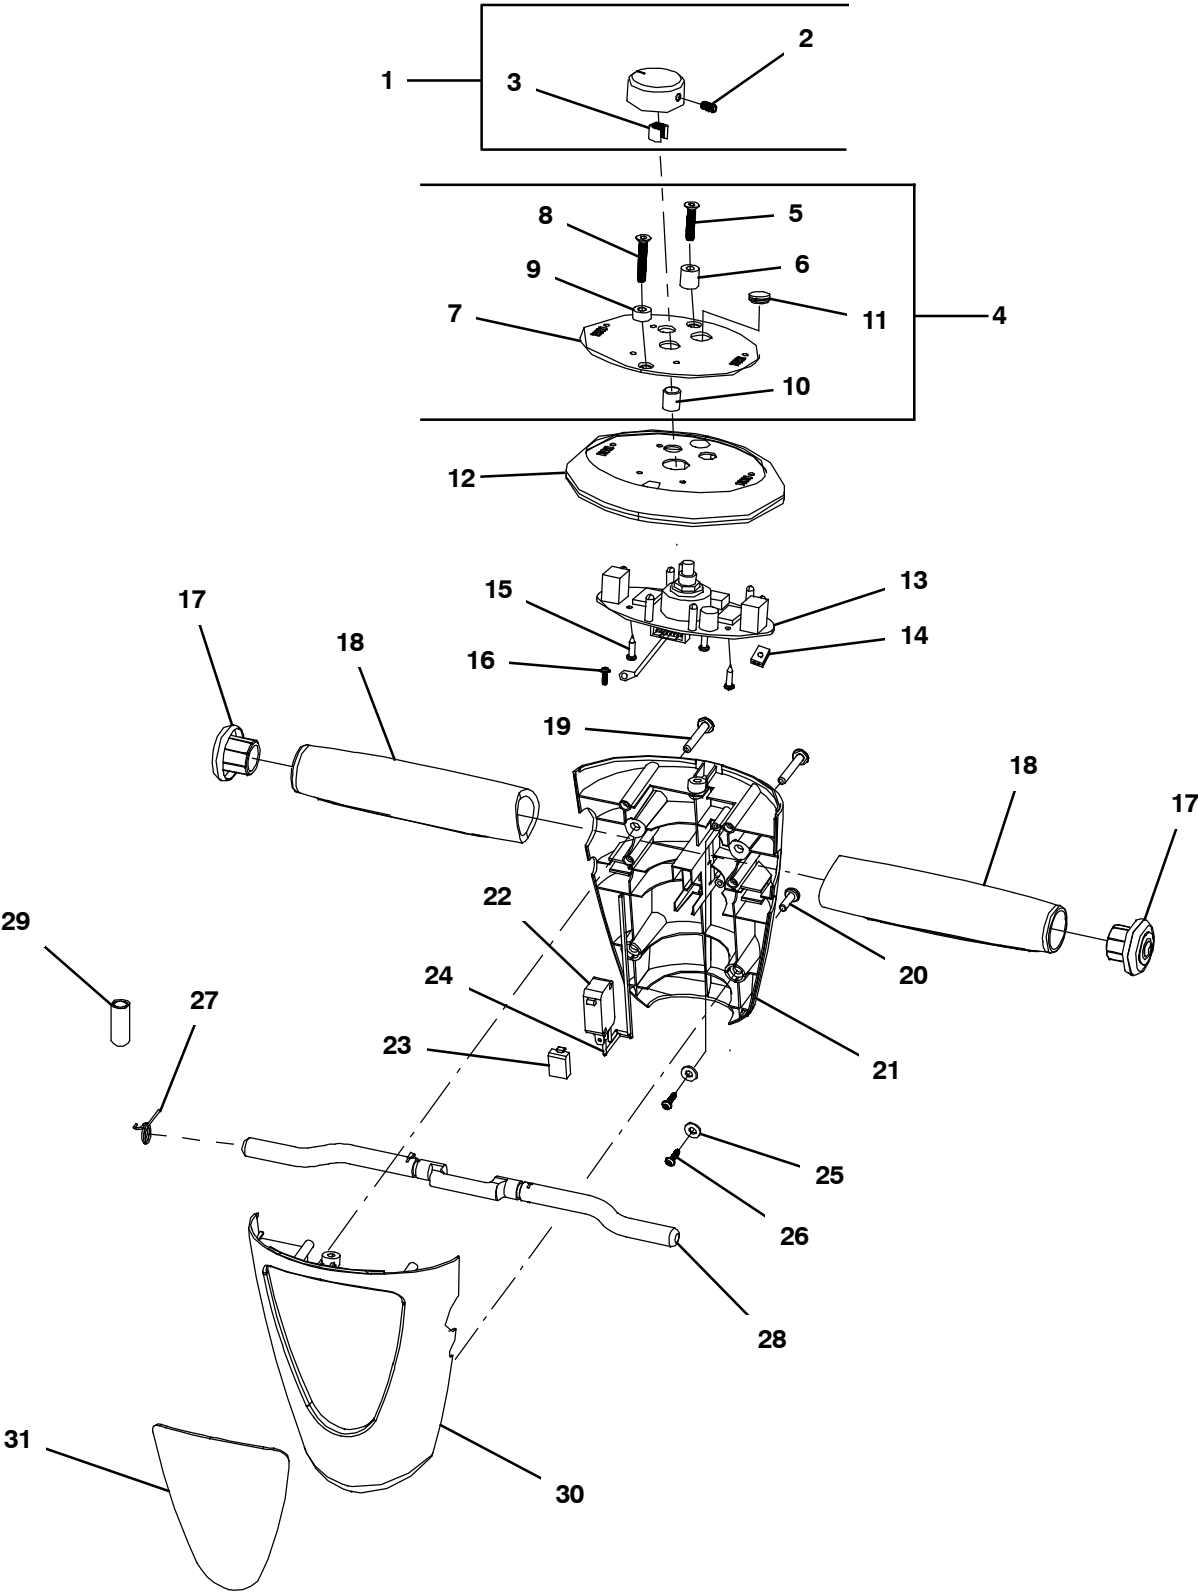

CONTROL CONSOLE ASSEMBLY

	Ref.	Part No.	Serial Number	Description	Qty.
▽	1	1237790	(630000-	) Knob Kit, Housing, Top [Xxl]	1
▲	2	N/A	(630000-	) Hexagon Socket Set Screw M4 x 8	1
▲	3	N/A	(630000-	) Fixation Insert Turning Button	1
▽	4	1246338	(630000-	) Hardware Kit, Control Hsg [Xxl Imop]	1
▲	5	N/A	(630000-	) M4x25 Countersunk Screw Stainless Steel	1
▲	6	N/A	(630000-	) Support Plastic Bush Top Al Sticker Long	1
▲	7	1237766	(630000-	) Decal Kit, Instr, Dash [Xxl]	1
▲	8	N/A	(630000-	) M4x20 Countersunk Screw Stainless Steel	1
▲	9	N/A	(630000-	) Support Plastic Bush Top Al Sticker Short	1
▲	10	N/A	(630000-	) Water Save Button	1
▲	11	N/A	(630000-	) Rubber Block Water Save Adjustment Hole[A]	1
	12	1252788	(630000-	) Control, Hsg, Top [w/bumper xl & xxl]	1
▽		1255496	(630000-	) Circuitboard Kit, W/Hardware [Imop Xxl] (Includes Decal Item #7 and Water Save Button Item #10)	1
▲	13	N/A	(630000-	) Circuitboard, Cntrl [XXL Plus Imop]	1
▲	14	N/A	(630000-	) Switch Wire Clamp, Color: Black	1
▲	15	N/A	(630000-	) Screw M3x12 Crosshead Selftapping Bl- ni Sst	3
▲	16	N/A	(630000-	) Screw 4x10	1
▽		1246485	(630000-	) Grip, Handle [Xxl Imop Set Of 2]	1
▲	17	N/A	(630000-	) End Cap Grip, Color: Blue (P312C)	2
▲	18	1237759	(630000-	) Grip, Handle [Xxl I- Mop Set Of 2]	1
▽		1246342	(630000-	) Housing Kit, Rear, W/Hardware [Xl & Xxl]	1
▲	19	N/A	(630000-	) Screw M4x35 Crosshead, Standard Thread Sst	2
▲	20	N/A	(630000-	) Screw M4x12 Crosshead, Standard Thread Sst	2
▲	21	1234959	(630000-	) Housing, Control, Rear [White, Imop]	1
▽		1246344	(630000-	) Switch Kit, Power [Xl & Xxl Imop]	1
▲	22	N/A	(630000-	) Power Switch Control Unit Omoron	1
▲	23	N/A	(630000-	) Rubber Block 15x10x5mm Injected	1
▲	24	N/A	(630000-	) On/Off Switch Wires / L=250mm	1
▲	25	N/A	(630000-	) Plastic Washer 9x4x1mm	2
▲	26	N/A	(630000-	) Screw Wn 5451 25x10 Ejot Delta Pt	2
▽		1246490	(630000-	) Trigger Asm, [Xl & Xxl Imop]	1
▲	27	N/A	(630000-	) Spring Switch Lever Dia 0.8mm	1
▲	28	1234961	(630000-	) Handle, Control [Blue, Imop]	1
	29	1246347	(630000-	) Ring, Magnetic, Easy Scrub [Xl & Xxl]	1
	30	1234962	(630000-	) Housing, Control, Front [White, Imop]	1
	31	1251764	(630000-	) Plate, Label, w/clip [imop Xxl plus]	1


▽ ASSEMBLY

▲ INCLUDED IN ASSEMBLY

N/A = NOT AVAILABLE SEPARATELY - MUST ORDER ASSEMBLY (▽)

CLEAN WATER TANK ASSEMBLY

355673

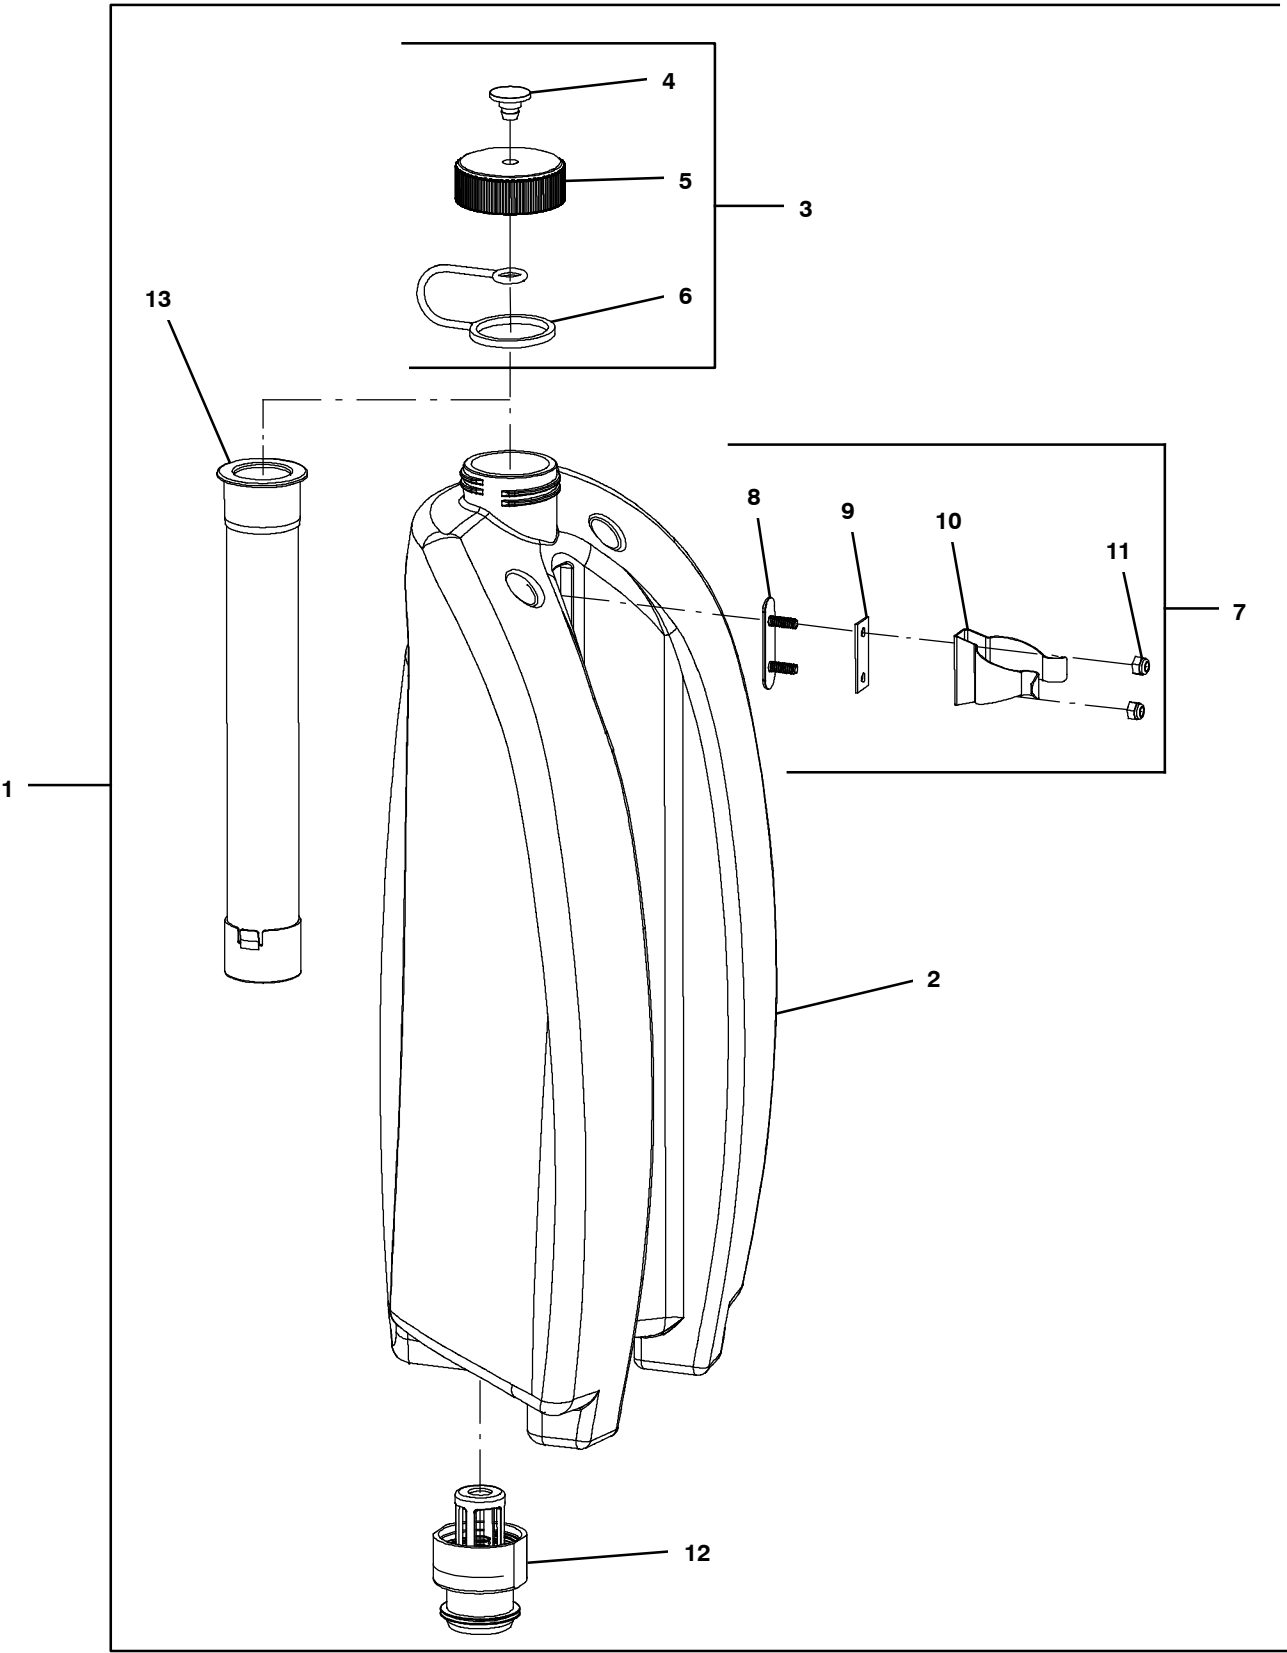

CLEAN WATER TANK ASSEMBLY

	Ref.	Part No.	Serial Number	Description	Qty.
▽	1	1237699	(630000-	) Tank Assy, Sol, Std [Blue Cap Xxl]	1
▽	1	1237702	(630000-	) Tank Assy, Sol, Opt [Red Cap Xxl]	1
▽	1	1237700	(630000-	) Tank Assy, Sol, Opt [Yellow Cap Xxl]	1
▽	1	1237701	(630000-	) Tank Assy, Sol, Opt [Green Cap Xxl]	1
▲	2	N/A	(630000-	) Clean Water Compartment	1
▲▽	3	1232663	(630000-	) Cap Kit, Tank, Sol [Blue] (Standard)	1
▲▽	3	1232665	(630000-	) Cap Kit, Tank, Sol [Red] (Option)	1
▲▽	3	1232666	(630000-	) Cap Kit, Tank, Sol [Yellow] (Option)	1
▲▽	3	1232667	(630000-	) Cap Kit, Tank, Sol [Green] (Option)	1
▲▲	4	N/A	(630000-	) Sleeve Cap Holder Clean Tank	1
▲▲	5	N/A	(630000-	) Cap With Hole	1
▲▲	6	N/A	(630000-	) Cap Holder	1
▲▽	7	1232676	(630000-	) Clip, Retaining, Tank (Includes Qty 1 Clip Assembly)	1
▲▲	8	N/A	(630000-	) Holder Plate Clip Clean Tank	1
▲▲	9	N/A	(630000-	) Rubber Cushion For Metal Clip	1
▲▲	10	N/A	(630000-	) Clip, Retaining, Tank	1
▲▲	11	N/A	(630000-	) Nut M4 Nylon Stainless	2
▲	12	1232519	(630000-	) Coupling, Water	1
▲	13	N/A	(630000-	) Hose Assy, Filling (Located Inside of Tank Assembly)	1


▽ ASSEMBLY

▲ INCLUDED IN ASSEMBLY

N/A = NOT AVAILABLE SEPARATELY - MUST ORDER ASSEMBLY (▽)

DIRTY WATER TANK ASSEMBLY

355674

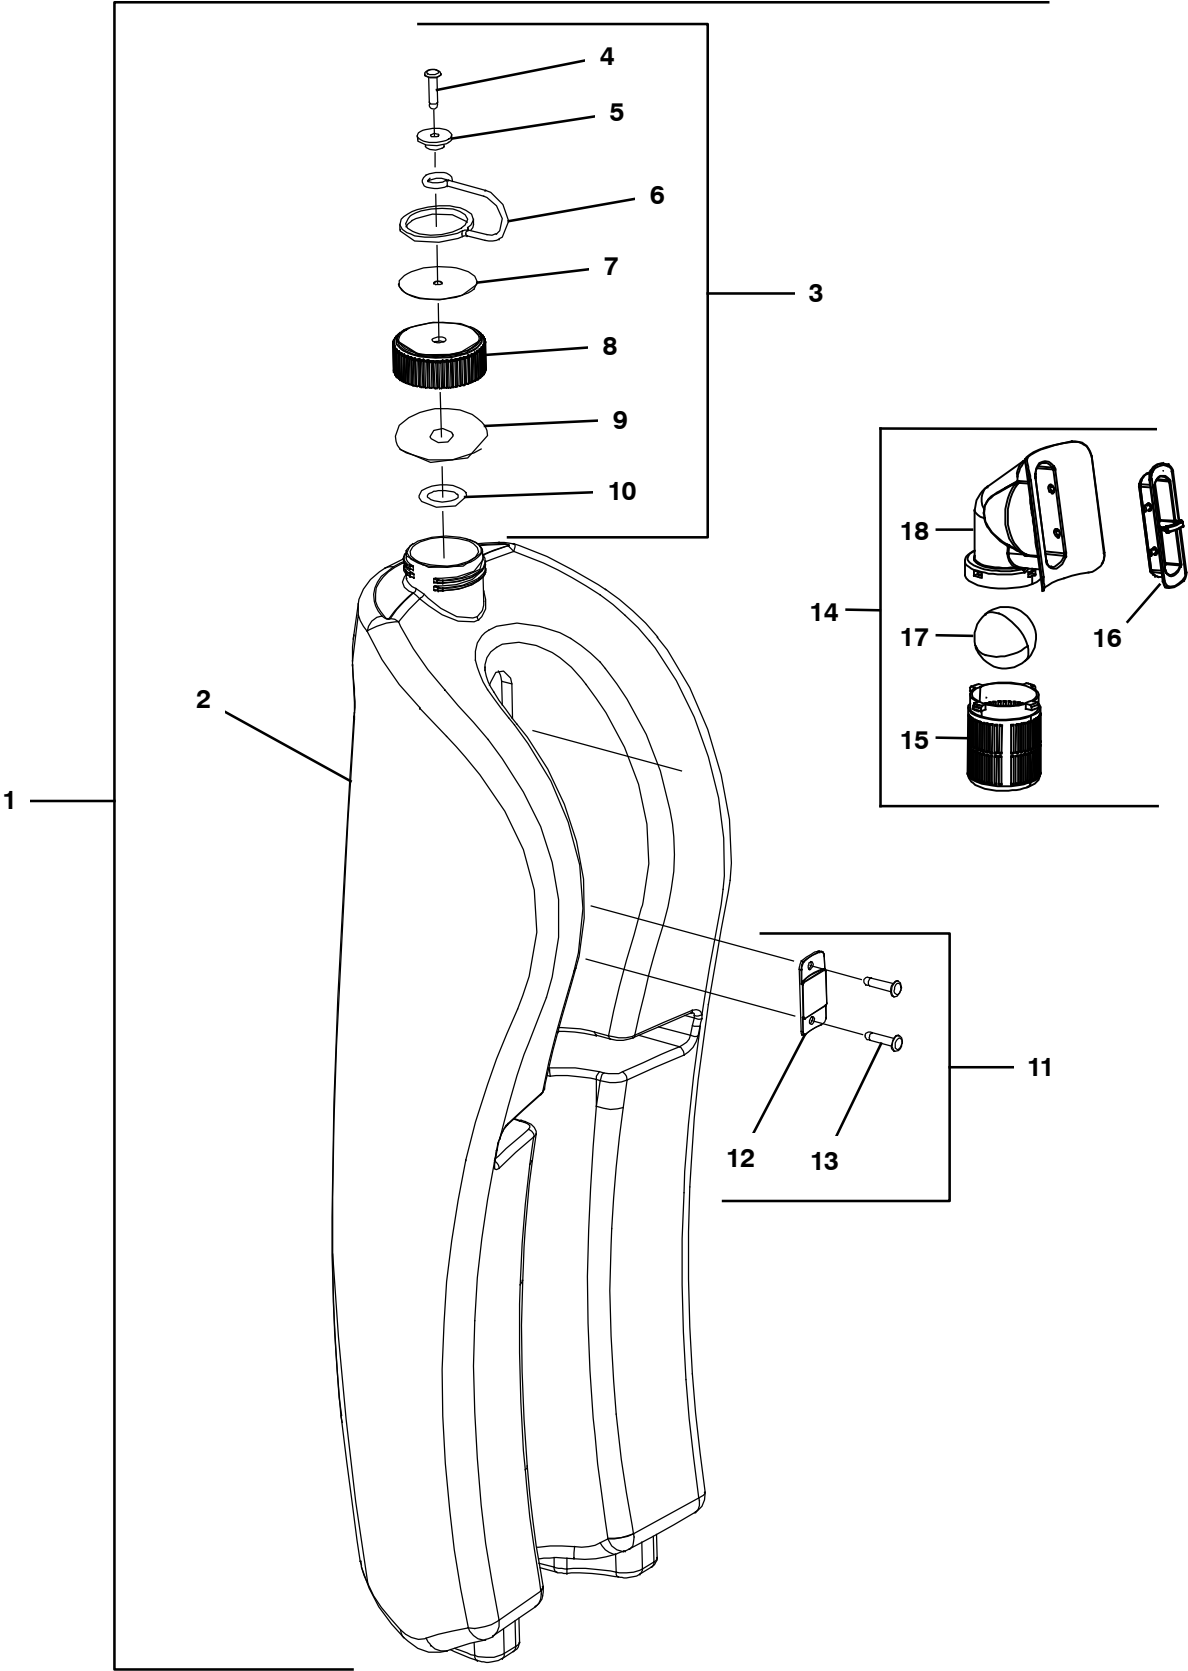

DIRTY WATER TANK ASSEMBLY

	Ref.	Part No.	Serial Number	Description	Qty.
▽	1	1251760	(630000-	) Tank Assy, Rec [Xxl plus imop]	1
▲	2	N/A	(630000-	) Dirty Water Compartment	1
▲▽	3	1232661	(630000-	) Cap Kit, Tank, Rec	1
▲▲	4	N/A	(630000-	) Blind Rivet Nail 4 X 15 Mmg	1
▲▲	5	N/A	(630000-	) Sleeve Cap Holder	1
▲▲	6	N/A	(630000-	) Cap Holder	1
▲▲	7	N/A	(630000-	) Warning Plate On Dirty Tank Round Stainless 4.5mm	1
▲▲	8	N/A	(630000-	) Cap Without Hole	1
▲▲	9	N/A	(630000-	) Sealing Gasket Cap Dirty Tank	1
▲▲	10	N/A	(630000-	) Plastic Washer 9x4x1mm	1
▲▽	11	1232600	(630000-	) Plate, Mtg, Tank	1
▲▲	12	N/A	(630000-	) Fixation Plate Dirt Compartment	1
▲▲	13	N/A	(630000-	) Blind Rivet Nail 4 X 15 Mmg	2
▲▽	14	1251765	(630000-	) Float Asm, Ball [xl & xxl plus imop]	1
▲▲	15	1251766	(630000-	) Cage, Ball, Float [xl & xxl plus imop]	1
▲▲	16	1251767	(630000-	) Support, Housing [xl & xxl plus imop]	1
▲▲	17	1251768	(630000-	) Ball, Float [xl & xxl plus imop]	1
▲▲	18	1251769	(630000-	) Housing, Ball, Float [xl & xxl plus imop]	1


▽ ASSEMBLY

▲ INCLUDED IN ASSEMBLY

N/A = NOT AVAILABLE SEPARATELY - MUST ORDER ASSEMBLY (▽)

SCRUB HEAD ASSEMBLY

355675

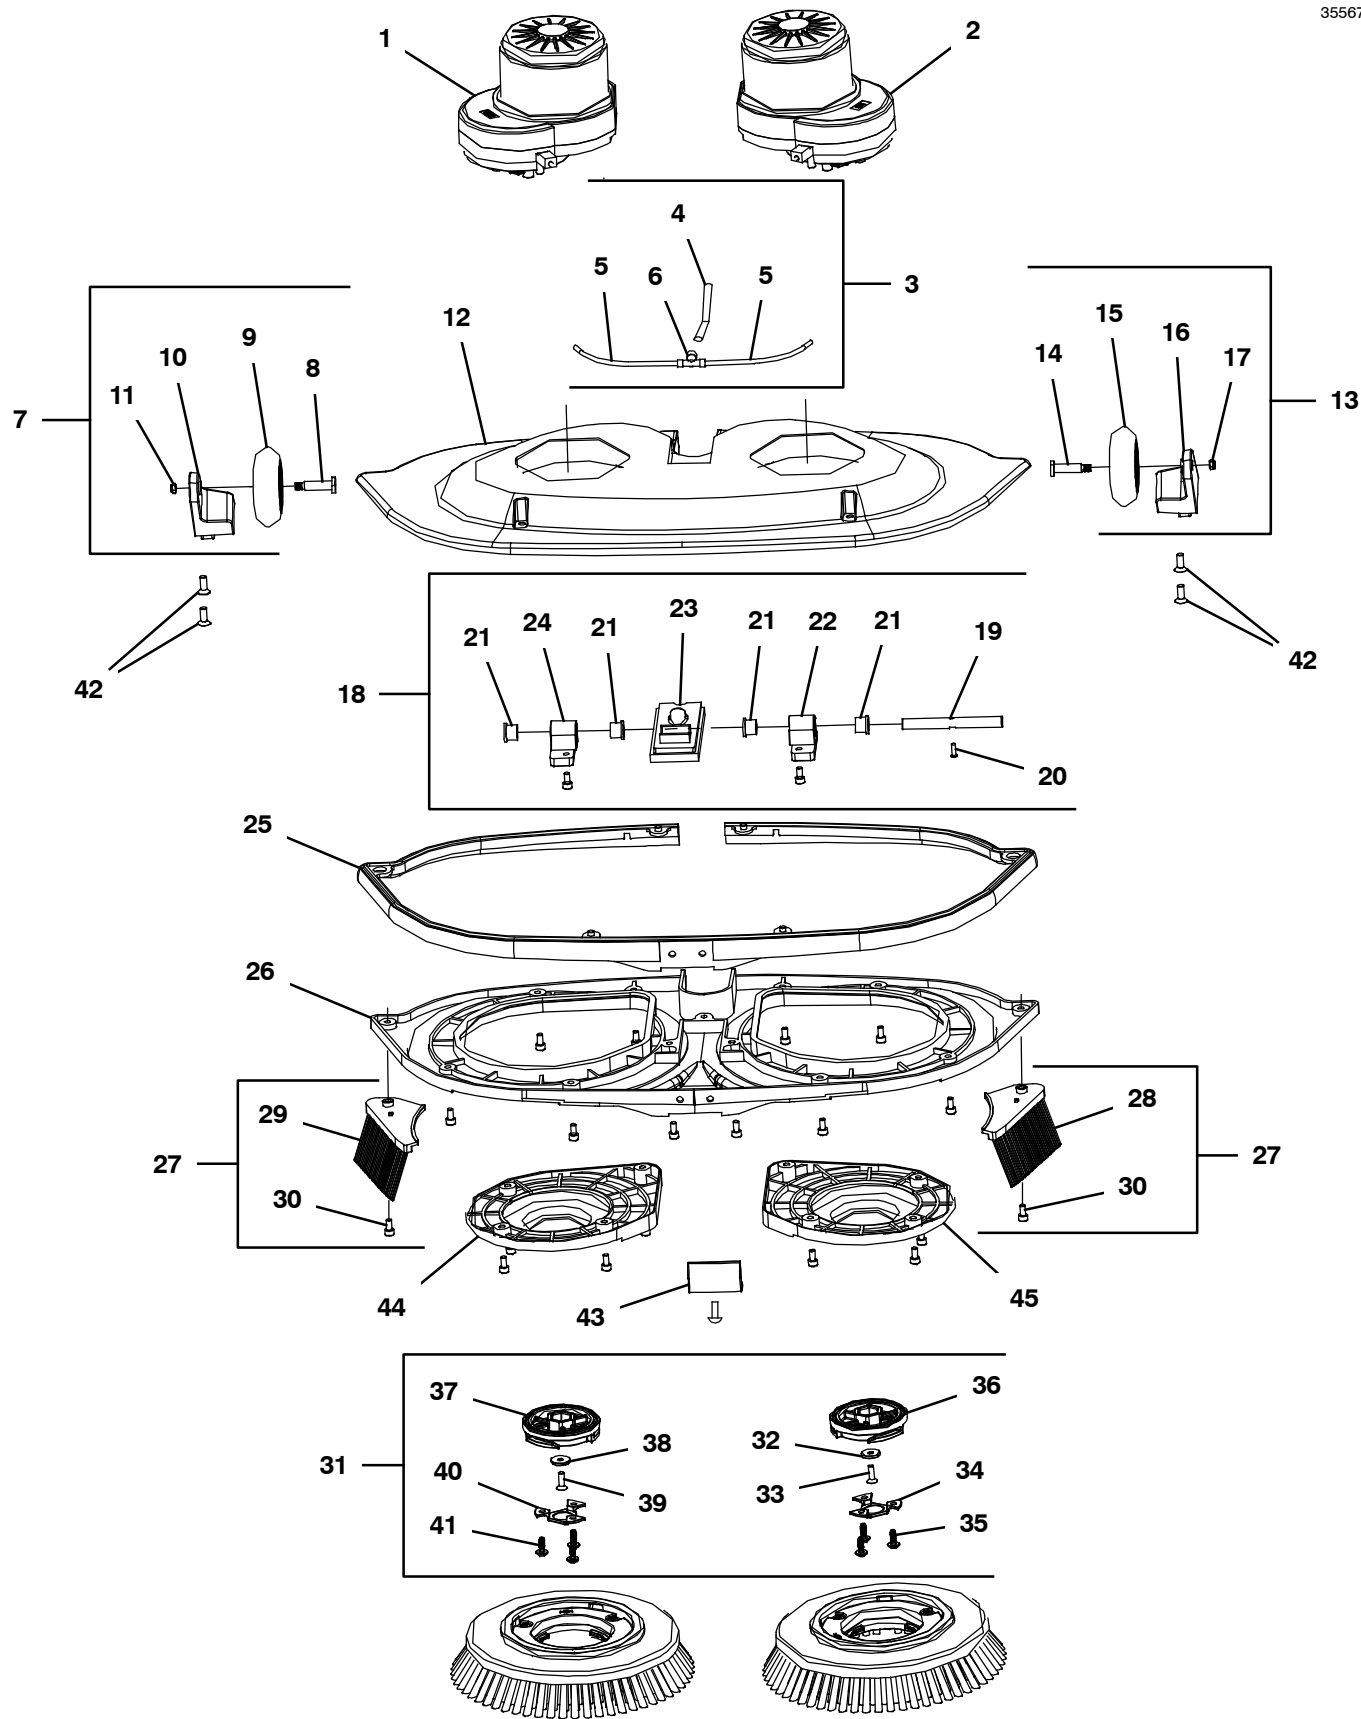

SCRUB HEAD ASSEMBLY

Ref.	Part No.	Serial Number	Description	Qty.
	1	1237747	(630000-) Motor, Brush, Rh [Xxl] (See Brush Motor Assembly)	1
	2	1237746	(630000-) Motor, Brush, Lh [Xxl] (See Brush Motor Assembly)	1
▽	3	1232693	(630000-) Fitting Assy, Water Channel [Imop]	1
▲	4	N/A	(630000-) Water Channel Dia. 6mm L:690mm	1
▲	5	N/A	(630000-) Water Channel Dia. 4mm L:110mm	2
▲	6	N/A	(630000-) Water Coupling Brush Motor	1
▽	7	1237742	(630000-) Transport Kit, Caster, Rh [Xxl]	1
▲	8	N/A	(630000-) Shaft Transport Caster	1
▲	9	N/A	(630000-) Transport Caster	1
▲	10	N/A	(630000-) Transport Wheel Pilar Right	1
▲	11	N/A	(630000-) Nut M5 Nylon	1
	12	1237739	(630000-) Cover, Motor, Cover [Xxl]	1
▽	13	1237741	(630000-) Transport Kit, Caster, Lh [Xxl]	1
▲	14	N/A	(630000-) Shaft Transport Caster	1
▲	15	N/A	(630000-) Transport Caster	1
▲	16	N/A	(630000-) Transport Wheel Pilar Left	1
▲	17	N/A	(630000-) Nut M5 Nylon	1
▽	18	1232714	(630000-) Hinge Kit, Hd, Brush	1
▲	19	N/A	(630000-) Chassis Hinge	1
▲	20	N/A	(630000-) Nylok Screw Counter Sunk Bolt M4x12	1
▲	21	1246382	(630000-) Bushing, Cover, Motor [Xxl Imop]	4
▲	22	N/A	(630000-) Brush Unit Hinge Support Left	1
▲	23	N/A	(630000-) Construction Cover Seal	1
▲	24	N/A	(630000-) Brush Unit Hinge Support Right	1
	25	1237743	(630000-) Bumper, Brush [Xxl]	1
	26	1237745	(630000-) Cover, Brush, Bottom [Xxl]	1
▽	27	1237988	(630000-) Splash Kit, Guards [Xxl Lh & Rh]	1
▲	28	N/A	(630000-) Splashing Guard Imop Left	1
▲	29	N/A	(630000-) Splashing Guard Imop Right	1
▲	30	N/A	(630000-) Nylok Hexagon Socket Head Cap Screw M5x20	2
▽	31	1232675	(630000-) Cover, Brush, Motor (Includes Qty 2 Cover Assemblies)	1
▲▽		1246378	(630000-) Drive, Brush, Left [XI & Xxl Imop]	1
▲▲	32	N/A	(630000-) Support Disk Driving Wheel Side Hole Dia 5mm	1
▲▲	33	1234973	(630000-) Screw, Flt, Soc, M5 X 18.5 Lh NI [Imop]	1
▲▲	34	N/A	(630000-) Cover Brush Motor Screw Color: Blue	1
▲▲	35	N/A	(630000-) Screw Wn 5451 50x14 Ejot Delta Pt	3
▲▲	36	N/A	(630000-) Driving Wheel Bottom Left Color: Gray	1
▲▽		1246377	(630000-) Drive, Brush, Right [XI & Xxl]	1
▲▲	37	N/A	(630000-) Driving Wheel Bottom Right Color: Gray	1
▲▲	38	N/A	(630000-) Support Disk Driving Wheel Side Hole Dia 5mm	1
▲▲	39	1234972	(630000-) Screw, Flt, Soc, M5 X 18.5 NI [10x,Imop]	1
▲▲	40	N/A	(630000-) Cover Brush Motor Screw Color: Blue	1
▲▲	41	N/A	(630000-) Screw Wn 5451 50x14 Ejot Delta Pt	3
	42	1234969	(630000-) Screw, Flt, Soc, M6 X 16 NI [10x,Imop]	4
	43	1237736	(630000-) Bumper, [Xxl]	1
	44	1237738	(630000-) Plate, Mount, Motor, Rh [Xxl]	1
	45	1237737	(630000-) Plate, Mount, Motor, Lh [Xxl]	1


▽ ASSEMBLY

▲ INCLUDED IN ASSEMBLY

N/A = NOT AVAILABLE SEPARATELY - MUST ORDER ASSEMBLY (▽)

BRUSH MOTOR ASSEMBLY

355680

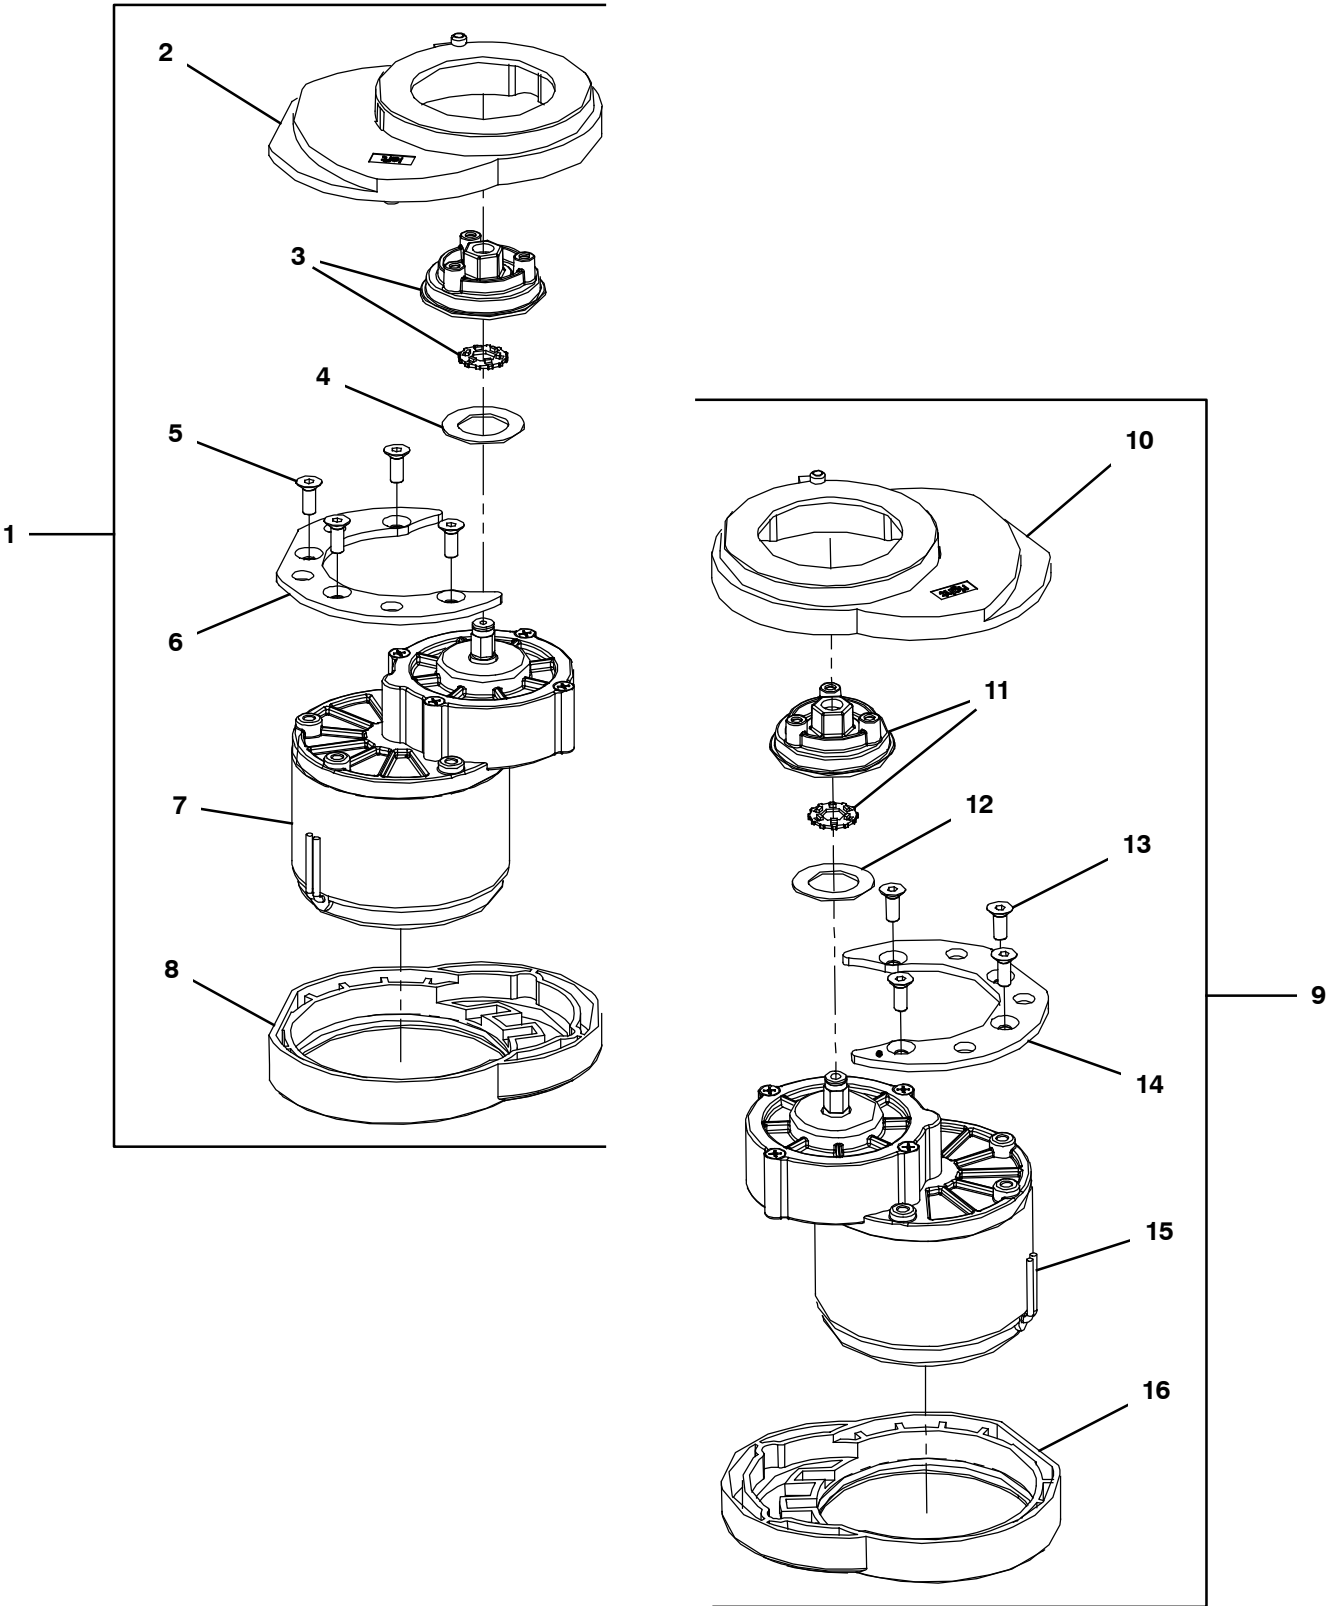

BRUSH MOTOR ASSEMBLY

	Ref.	Part No.	Serial Number	Description	Qty.
▽	1	1237746	(630000-	) Motor, Brush, Lh [Xxl]	1
▲	2	N/A	(630000-	) Brush Motor Support Rubber Left	1
▲	3	1237826	(630000-	) Wheel, Driving, W/Metal Insert [Xxl]	1
▲	4	N/A	(630000-	) Felt Brush Motor	1
▲	5	N/A	(630000-	) Nylock Screw Counter Sunk Bolt M6 x 16	4
▲	6	N/A	(630000-	) Brush Motor Construction Ring Left	1
▲	7	N/A	(630000-	) Brush Motor Helical Gears Left	1
▲	8	N/A	(630000-	) Brush Motor Fixation Conductive Rubber Left	1
▽	9	1237747	(630000-	) Motor, Brush, Rh [Xxl]	1
▲	10	N/A	(630000-	) Brush Motor Support Rubber Right	1
▲	11	1237826	(630000-	) Wheel, Driving, W/Metal Insert [Xxl]	1
▲	12	N/A	(630000-	) Felt Brush Motor	1
▲	13	N/A	(630000-	) Nylock Screw Counter Sunk Bolt M6 x 16	4
▲	14	N/A	(630000-	) Brush Motor Construction Ring Right	1
▲	15	N/A	(630000-	) Brush Motor Helical Gears Right	1
▲	16	N/A	(630000-	) Brush Motor Fixation Conductive Rubber Right	1


▽ ASSEMBLY

▲ INCLUDED IN ASSEMBLY

N/A = NOT AVAILABLE SEPARATELY - MUST ORDER ASSEMBLY (▽)

BRUSH DRIVER ASSEMBLY

355681

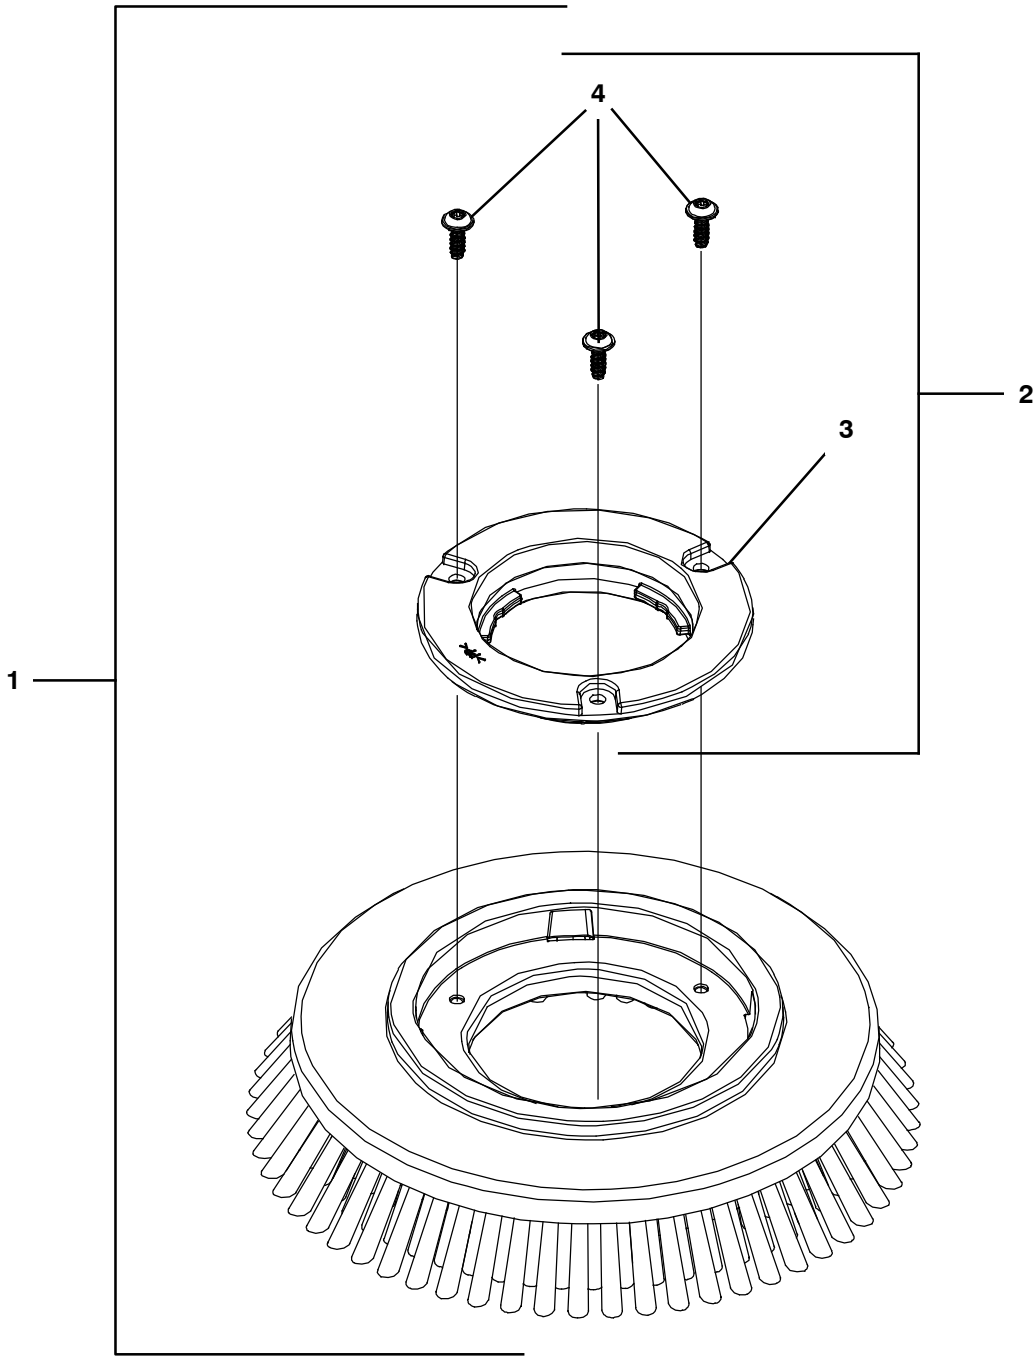

BRUSH DRIVER ASSEMBLY

	Ref.	Part No.	Serial Number	Description	Qty.
▽	1	1237713	(630000-	) Brush, Med, Blu, 11.8 [Xxl Qty 2] (Standard - Medium Duty Daily Scrubbing)	1
▽	1	1237714	(630000-	) Brush, Soft, Lt Blu, 11.8 [Xxl Qty 2] (Option - Soft Light Duty Cleaning)	1
▽	1	1237715	(630000-	) Brush, Hard, Red, 11.8 [Xxl Qty 2] (Option - Heavy Duty Deep Cleaning & Grout)	1
▲▽	2	1232620	(630000-	) Driver Kit, Brush [Blue] (Set of 2) (Standard)	1
▲▽	2	1232622	(630000-	) Driver Kit, Brush [Red] (Set of 2) (Option)	1
▲▽	2	1232624	(630000-	) Driver Kit, Brush [Yellow] (Set of 2) (Option)	1
▲▽	2	1232626	(630000-	) Driver Kit, Brush [Green] (Set of 2) (Option)	1
▲▲	3	N/A	(630000-	) Brush Locker Blue (Standard)	2
▲▲	3	N/A	(630000-	) Brush Locker Red (Option)	2
▲▲	3	N/A	(630000-	) Brush Locker Yellow (Option)	2
▲▲	3	N/A	(630000-	) Brush Locker Green (Option)	2
▲▲	4	N/A	(630000-	) Screw Wn 5451 50x14 Ejot Delta Pt	6


▽ ASSEMBLY

▲ INCLUDED IN ASSEMBLY

N/A = NOT AVAILABLE SEPARATELY - MUST ORDER ASSEMBLY (▽)

PAD DRIVER ASSEMBLY

355586

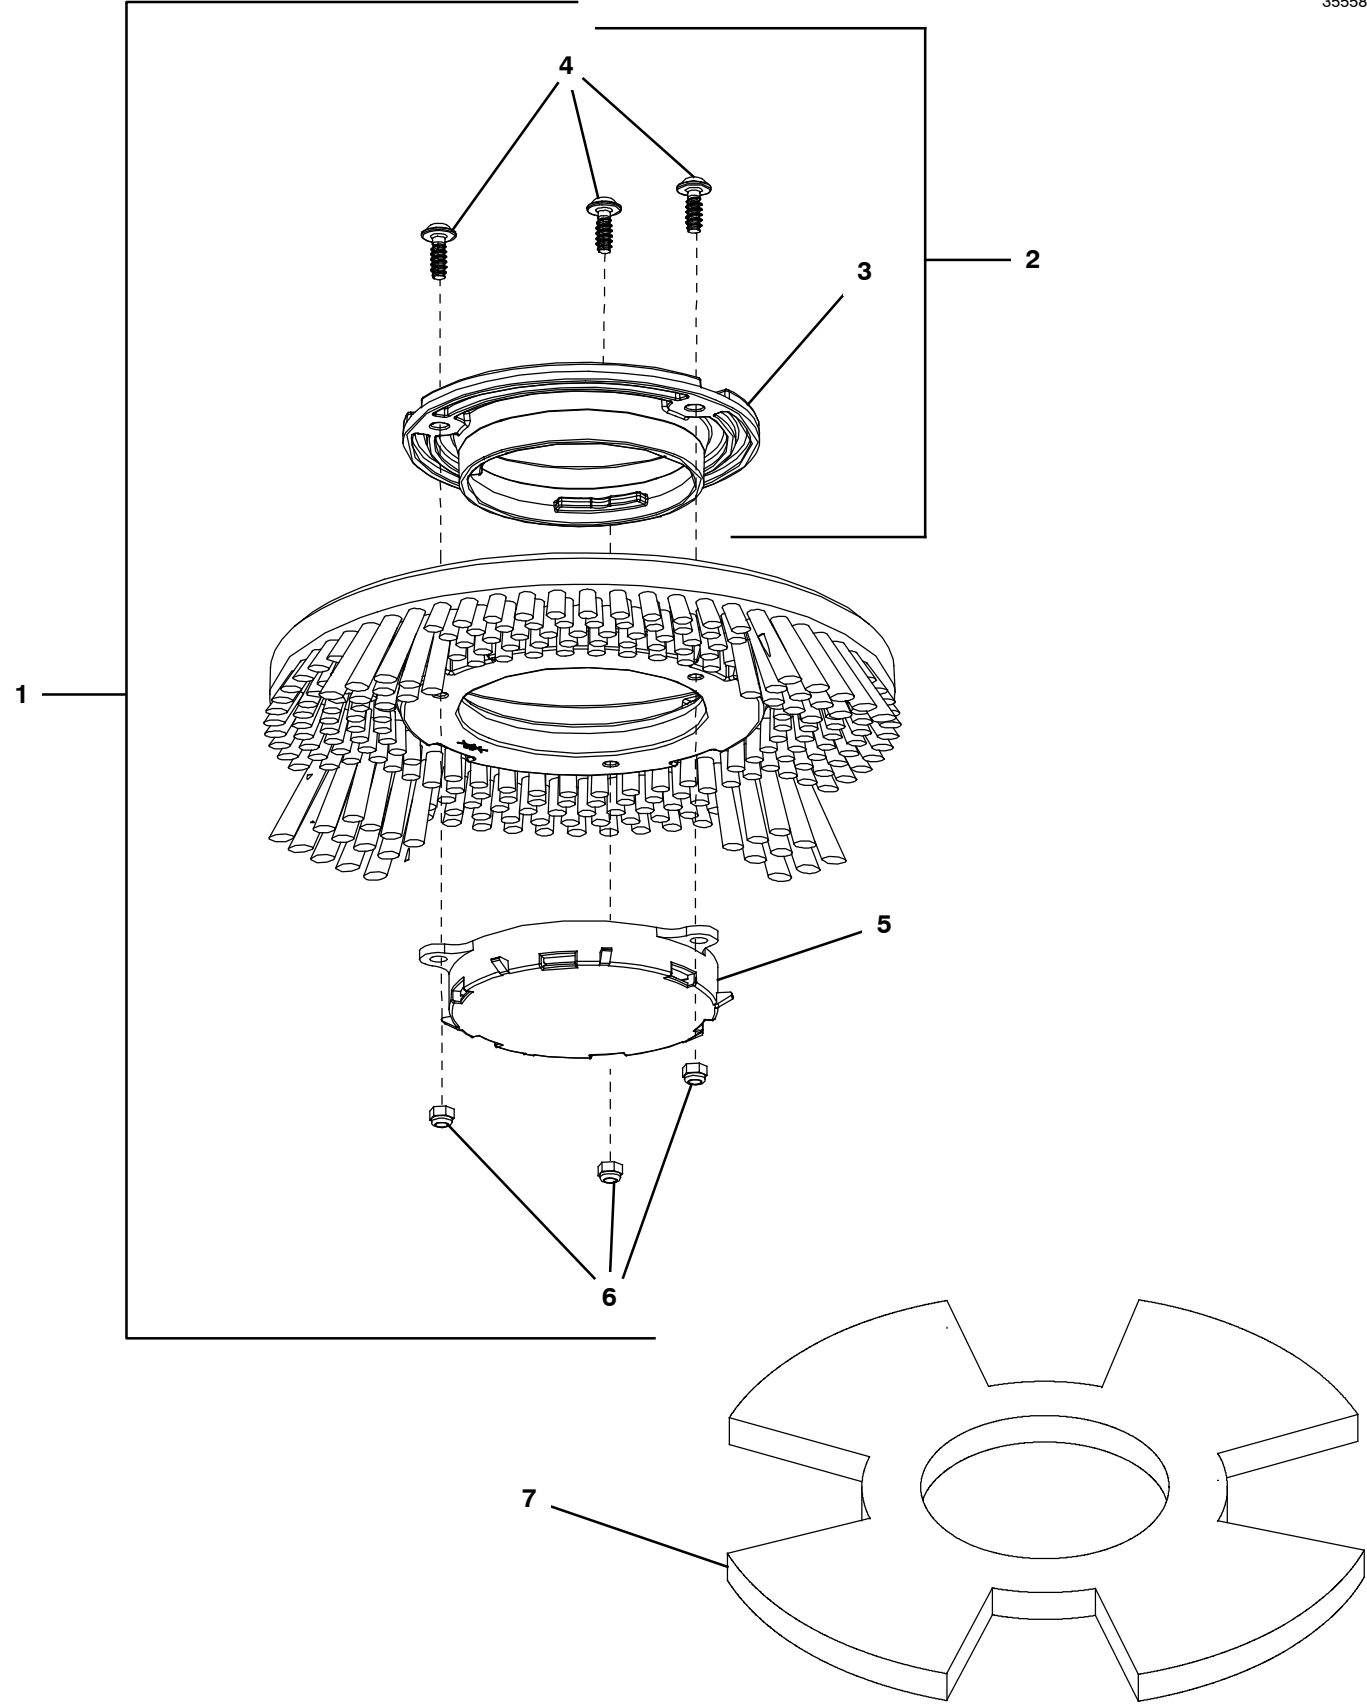

PAD DRIVER ASSEMBLY

	Ref.	Part No.	Serial Number	Description	Qty.
▽	1	1237716	(630000-	) Driver Assy, Pad, Blu, 11.7 [Xxl Qty 2]	1
▲▽	2	1232620	(630000-	) Driver Kit, Brush [Blue] (Standard)	2
▲▽	2	1232622	(630000-	) Driver Kit, Brush [Red] (Option)	2
▲▽	2	1232624	(630000-	) Driver Kit, Brush [Yellow] (Option)	2
▲▽	2	1232626	(630000-	) Driver Kit, Brush [Green] (Option)	2
▲▲	3	N/A	(630000-	) Brush Locker Blue (Standard)	2
▲▲	3	N/A	(630000-	) Brush Locker Red (Option)	2
▲▲	3	N/A	(630000-	) Brush Locker Yellow (Option)	2
▲▲	3	N/A	(630000-	) Brush Locker Green (Option)	2
▲▲	4	N/A	(630000-	) Screw Wn 5451 50x14 Ejot Delta Pt	6
▲	5	N/A	(630000-	) Assy Pad Holder Imop	2
▲	6	N/A	(630000-	) Nut M4 Nylon Stainless	6
	7	1237718	(630000-	) Pad, Red, 10.6 [Xxl Box Of 10] (Cleaning)	1
	7	1237717	(630000-	) Pad, White, 10.6 [Xxl Box Of 10] (Buffing)	1
	7	1237719	(630000-	) Pad, Green, 10.6 [Xxl Box Of 10] (Scrubbing)	1
	7	1237720	(630000-	) Pad, Blu, 10.6 [Xxl Box Of 10] (Scrubbing)	1
	7	1237721	(630000-	) Pad, Black, 10.6 [Xxl Box Of 10] (Light Stripping)	1
	7	1237725	(630000-	) Pad, Green, 10.6 [Xxl Twister Qty 2] (Diamond Polishing Pad - Daily Cleaning)	1
	7	1237722	(630000-	) Pad, Yellow, 10.6 [Xxl Twister Qty 2] (Diamond Polishing Pad - Periodic Cleaning)	1
	7	1237726	(630000-	) Pad, White, 10.6 [Xxl Twister Qty 2] (Diamond Polishing Pad - Deep Cleaning)	1
	7	1237727	(630000-	) Pad, Red, 10.6 [Xxl Twister Qty 2] (Diamond Polishing Pad - Deep Cleaning Aggressive)	1
	7	1237723	(630000-	) Pad, Orange, 10.6 [Xxl Twister Qty 2] (Diamond Polishing Pad - Ceramic Tiles)	1
	7	1237724	(630000-	) Pad, Blu, 10.6 [Xxl Twister Qty 2] (Diamond Polishing Pad - High Traffic Areas)	1


▽ ASSEMBLY

▲ INCLUDED IN ASSEMBLY

N/A = NOT AVAILABLE SEPARATELY - MUST ORDER ASSEMBLY (▽)

SQUEEGEE ASSEMBLY

355579

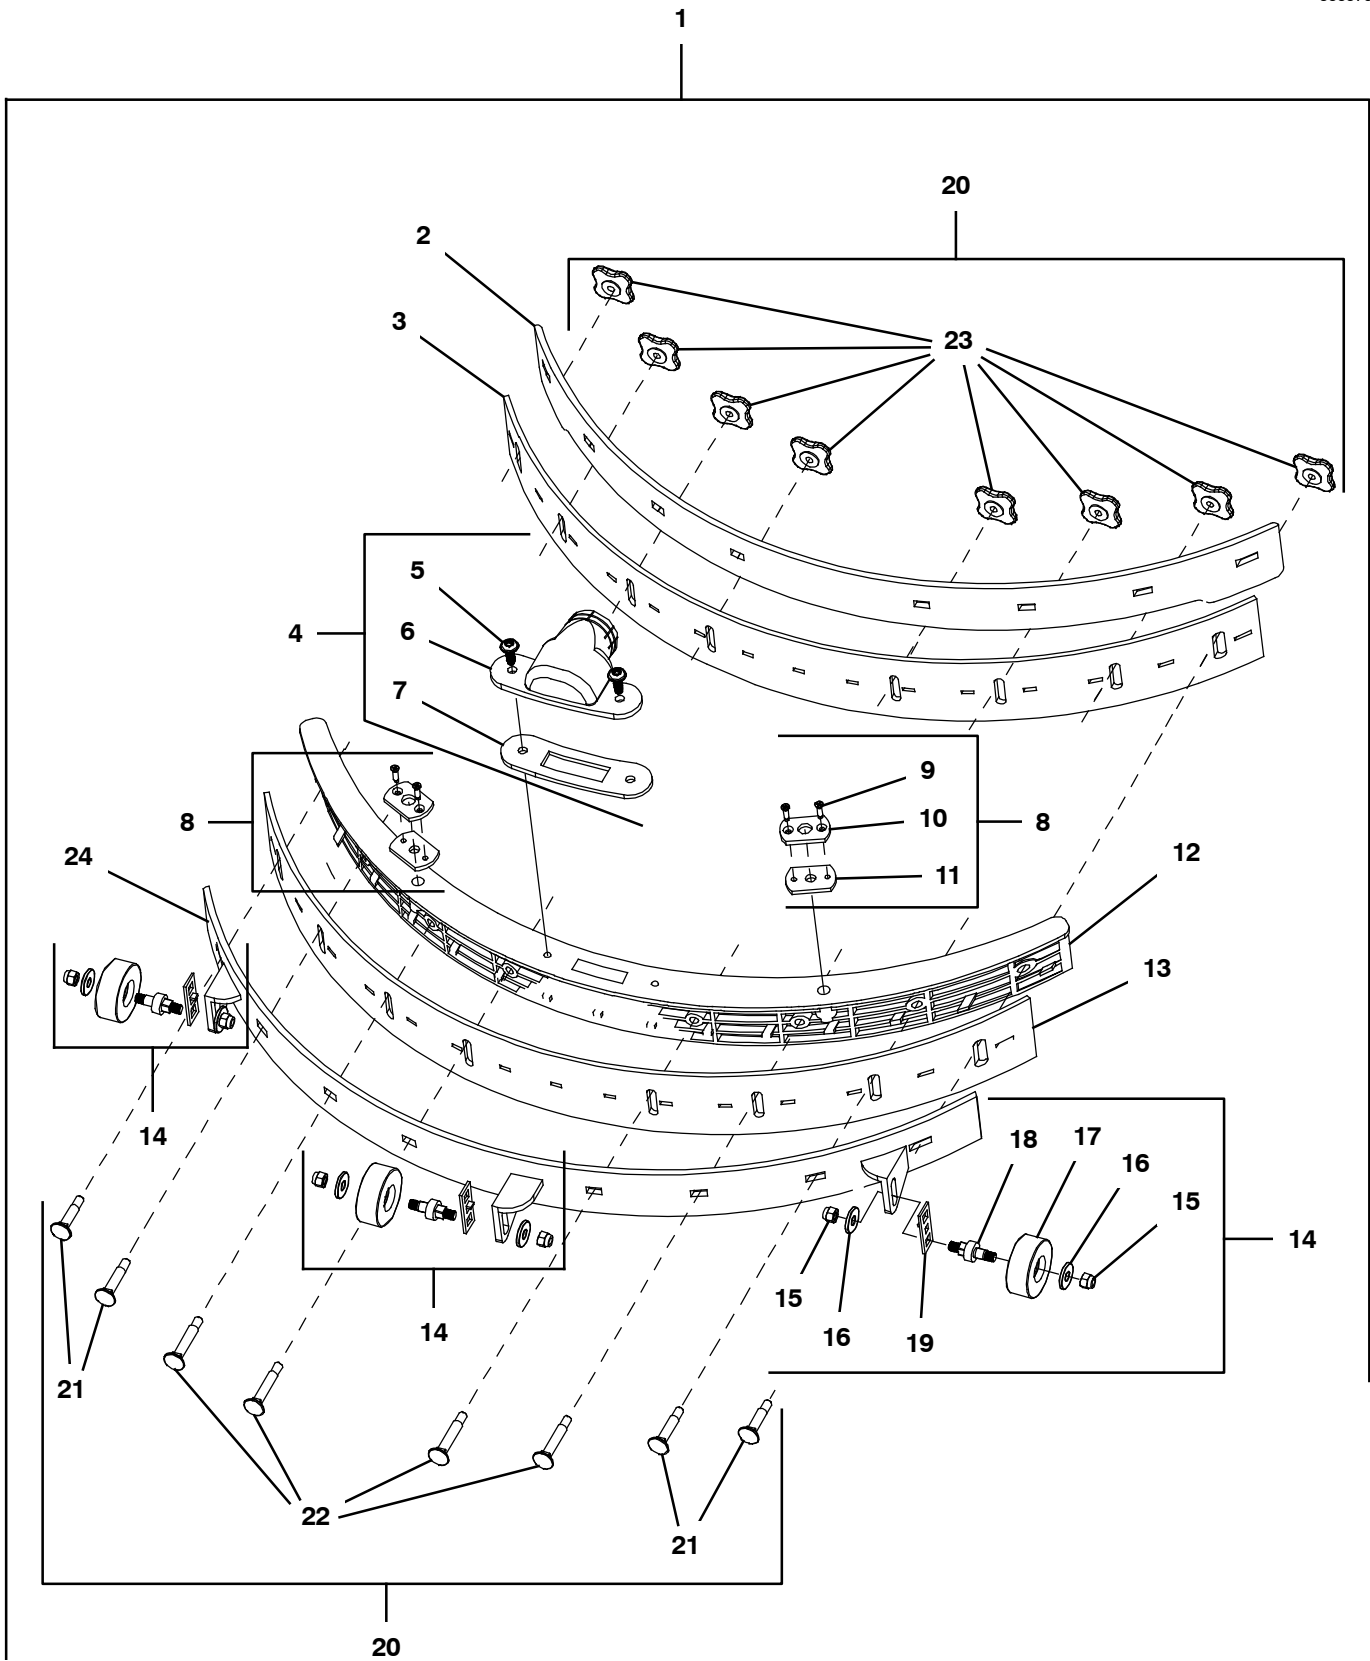

SQUEEGEE ASSEMBLY

	Ref.	Part No.	Serial Number	Description	Qty.
▽	1	1237728	(630000-	) Squeegee Assy, 26.0 [Xxl]	1
▲	2	1237756	(630000-	) Plate, Rear, Sqge [Xxl I- Mop]	1
▲	3	1237729	(630000-	) Blade, Sqge, Front 27.3 [Xxl Lina] (Standard - Red Linatex)	1
	3	1237731	(630000-	) Blade, Sqge, Frnt, 27.3 [Xxl Ure] (Option)	1
▲▽	4	1232677	(630000-	) Connector, Hose, Sqge	1
▲▲	5	1237799	(630000-	) Screw, 50 X 14 Ejot, W/Hex Head [Xxl]	2
▲▲	6	N/A	(630000-	) Squeegee Hose Connector- Up Yellow	1
▲▲	7	1234956	(630000-	) Gasket, Hose, Squeegee [Imop]	1
▲▽	8	1232696	(630000-	) Retaining Kit, Sqge (Includes Qty 2 Retaining Assemblies)	1
▲▲	9	N/A	(630000-	) M3x10 Countersunk Self Tap Screw	4
▲▲	10	1234947	(630000-	) Plate, Mtg, Sqge [Blue, Imop] (Qty 1)	2
▲▲	11	1233871	(630000-	) Washer, Rbr, Sqge [Black, Imop] (Qty 1)	2
	11	1234948	(630000-	) Washer, Rbr, Sqge [Black, Imop, Qty 100]	1
▲	12	1237757	(630000-	) Plate, Top, Sqge [Xxl I- Mop]	1
▲	13	1237730	(630000-	) Blade, Sqge, Rear, 28.7 [Xxl Lina] (Standard - Red Linatex)	1
	13	1237732	(630000-	) Blade, Sqge, Rear, 28.7 [Xxl Ure] (Option)	1
▲▽	14	1232673	(630000-	) Caster Assy, Sqge (Includes Qty 3 Caster Assemblies And Item #8 Retaining Assemblies)	1
▲▲	15	N/A	(630000-	) Nut M5 Nylon	6
▲▲	16	N/A	(630000-	) M5 Washer Stainless Steel 5x15x1mm	6
▲▲	17	N/A	(630000-	) Squeegee Castor Gray Dia 8mm	3
▲▲	18	N/A	(630000-	) Shaft Squeegee Castor Dia 8mm	3
▲▲	19	N/A	(630000-	) Height Adjustment Plate	3
▲▽	20	1232688	(630000-	) Knob Kit, Retainer, Sqge	1
▲▲	21	N/A	(630000-	) M5 Screw Bolt, Thread Length 30	4
▲▲	22	N/A	(630000-	) M5 Screw Bolt, Thread Length 35	4
▲▲	23	N/A	(630000-	) Plastic Nut Squeegee	8
▲	24	1237755	(630000-	) Plate, Rear, Sqge [Wheel Side Xxl I- Mop]	1


▽ ASSEMBLY

▲ INCLUDED IN ASSEMBLY

N/A = NOT AVAILABLE SEPARATELY - MUST ORDER ASSEMBLY (▽)

MAIN LEVER ASSEMBLY

355676

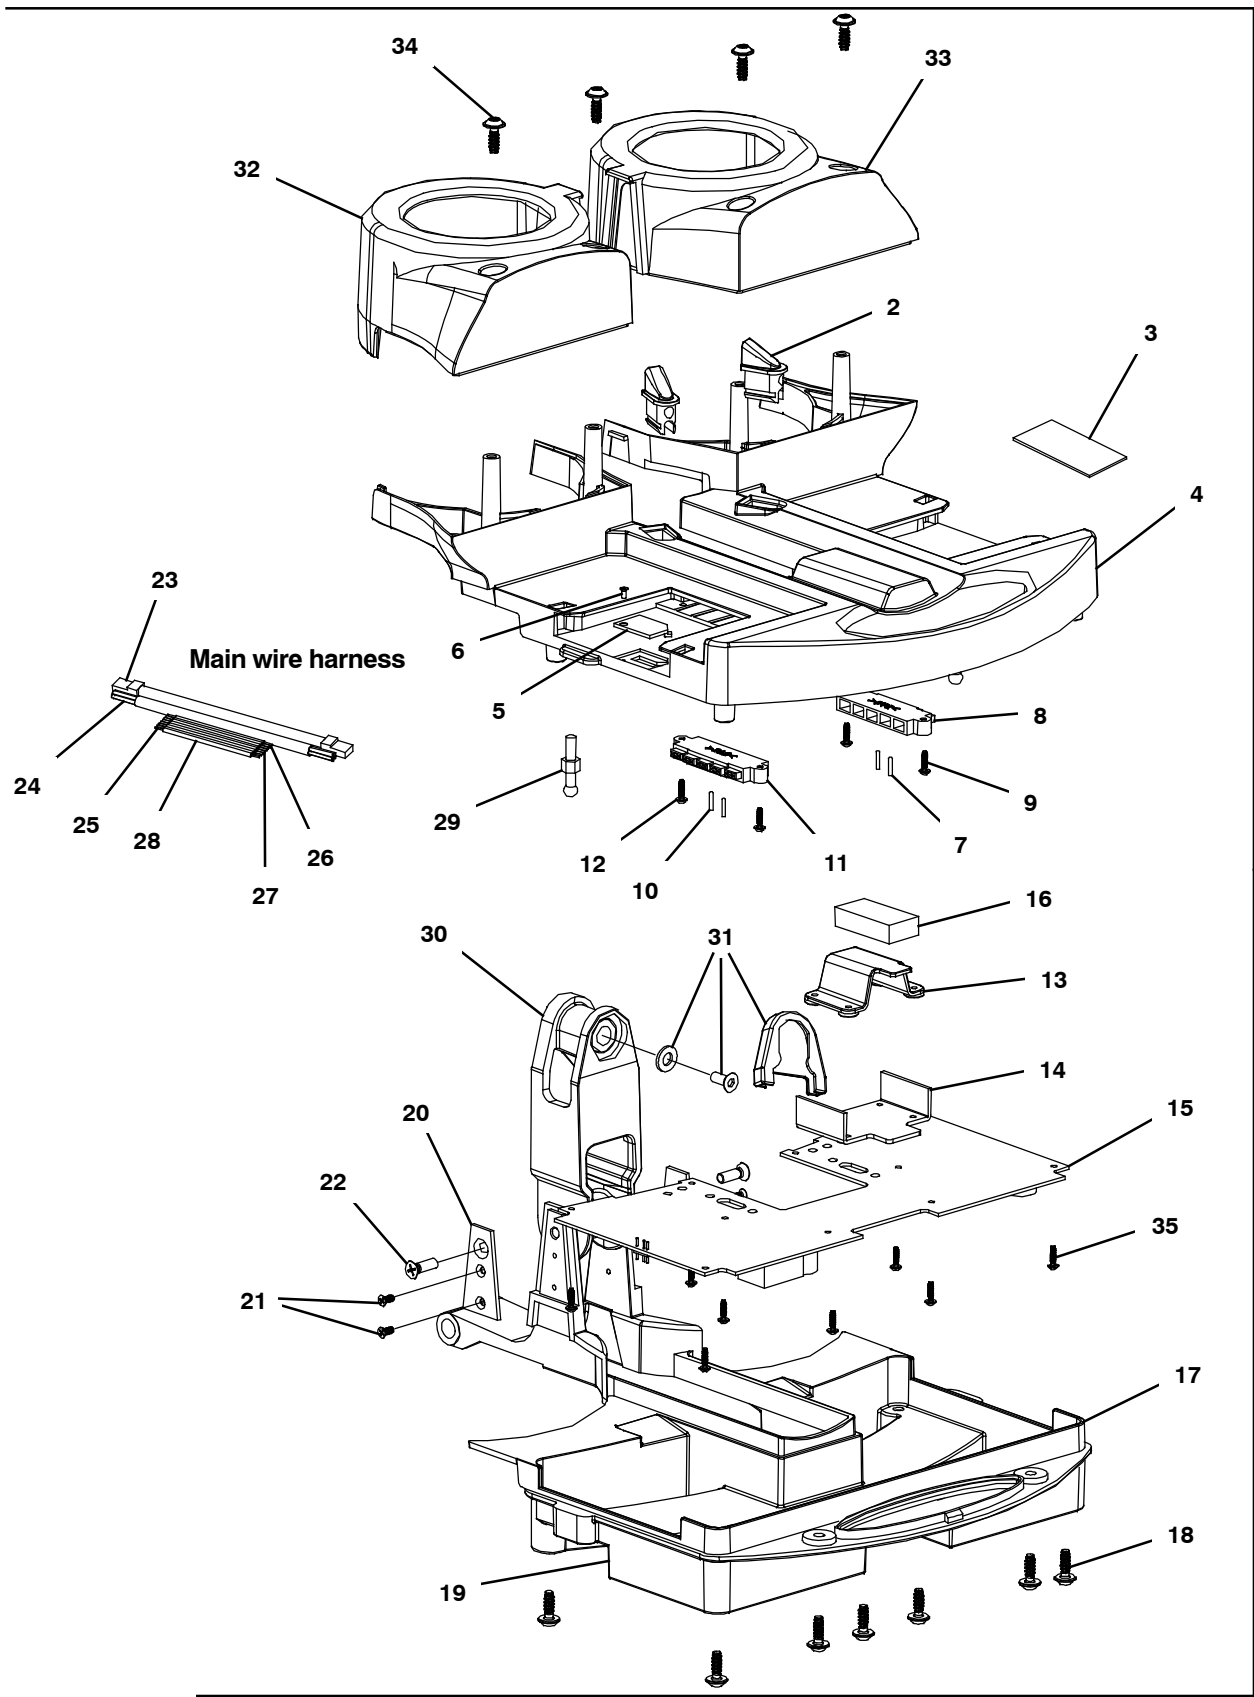

MAIN LEVER ASSEMBLY

	Ref.	Part No.	Serial Number	Description	Qty.
▽	1	1255499	(630000-	) Lever Assy, Handle [Imop Xxl& Plus]	1
▲▽		1246383	(630000-	) Cover, Lever, Main [Xxl Imop]	1
▲▲	2	N/A	(630000-	) Pcb Machine Seal	2
▲▲	3	N/A	(630000-	) Sticker Imop [Strong Magnets]	1
▲▲	4	1237754	(630000-	) Cover, Main, White [Xxl]	1
▲▲	5	1237798	(630000-	) Cover, Slot, Usb [Xxl]	1
▲▲	6	N/A	(630000-	) Screw Counter Sunk M1.7x6	1
▲▽		1246387	(630000-	) Connector, Battery, Rh [Xl & Xxl Imop]	1
▲▲	7	N/A	(630000-	) Alignment Pin Longer Version	2
▲▲	8	N/A	(630000-	) Battery Connector Male Right Color: Gray	1
▲▲	9	N/A	(630000-	) Screw Wn 5451 25x10 Ejot Delta Pt	2
▲▽		1246386	(630000-	) Connector, Battery, Lh [Xl & Xxl Imop]	1
▲▲	10	N/A	(630000-	) Alignment Pin Longer Version	2
▲▲	11	N/A	(630000-	) Battery Connector Male Left Color: Blue	1
▲▲	12	N/A	(630000-	) Screw Wn 5451 25x10 Ejot Delta Pt	2
▲	13	N/A	(630000-	) Magnet Top Unit Holder Color: Gray	1
▲	14	N/A	(630000-	) Steel Cover Isolation Magnet T=3mm	1
▲	15	1254496	(630000-	) Circuitboard, Main, W/Cutoff [Imop]	1
▲	16	N/A	(630000-	) Magnet Top Unit 40x20x10mm	1
▲▽		1246391	(630000-	) Lever Housing, Main [Xl & Xxl Imop]	1
▲▲	17	1234954	(630000-	) Housing, Lever, Main [Imop]	1
▲▲	18	N/A	(630000-	) Screw Wn 5451 50x14 Ejot Delta Pt	8
	19	N/A	(630000-	) Bottom Name Plate + Laser Print Tennant	1
▲▽		1246389	(630000-	) Plate Asm, Hinge [Xl & Xxl Imop]	1
▲▲	20	1234955	(630000-	) Plate, Sppt, Lever (2pc) [Imop]	2
▲▲	21	1234971	(630000-	) Screw, Flt, Soc, M3 X 8 Ss NI [10x,Imop]	4
▲▲	22	1234976	(630000-	) Screw, Flt, Soc, M5 X 16 NI [10x, Imop]	2
▲▽		1246388	(630000-	) Lever Asm, Main, Utp [Xl & 1251756Xxl Imop]	1
▲▲	23	1237768	(630000-	) Cable, Utp, 100cm L [I- Mop Xxl]	1
▲▲	24	N/A	(630000-	) Power Cable 3 Wires [1.5mm 2 L=630mm]	1
▲▲	25	N/A	(630000-	) Wires For Brush Unit 14awg Red L=280mm	2
▲▲	26	N/A	(630000-	) Male Connector + Wires 14awg Red 150mm	2
▲▲	27	N/A	(630000-	) Male Connector + Connector Wires 14awg Black 150mm	2
▲▲	28	N/A	(630000-	) Wires For Brush Unit 14awg Black L=280mm	2
▲	29	1246385	(630000-	) Pin, Squeegee [Xl & Xxl Imop] (Includes Qty 2)	1
▽	30	1237750	(630000-	) Hinge Kit, [Xxl] (Hinge Not Included in Assembly 1255499 - Only Available in Kit 1237750)	1
▲▲	31	1237828	(630000-	) Hardware Kit, Disk, Screw, Cover [Imop]	1
▲	32	1246381	(630000-	) Cover, Motor, Lh [Xxl Imop] (Includes Item #34 Qty 2)	1
▲	33	1246379	(630000-	) Cover, Motor, Rh [Xxl Imop] (Includes Item #34 Qty 2)	1
▲	34	N/A	(630000-	) Screw Wn 5451 50x14 Ejot Delta Pt	4
▲	35	N/A	(630000-	) Screw Wn 5451 25x10 Ejot Delta Pt	12


▽ ASSEMBLY

▲ INCLUDED IN ASSEMBLY

N/A = NOT AVAILABLE SEPARATELY - MUST ORDER ASSEMBLY (▽)

BATTERY PACK ASSEMBLY

355682

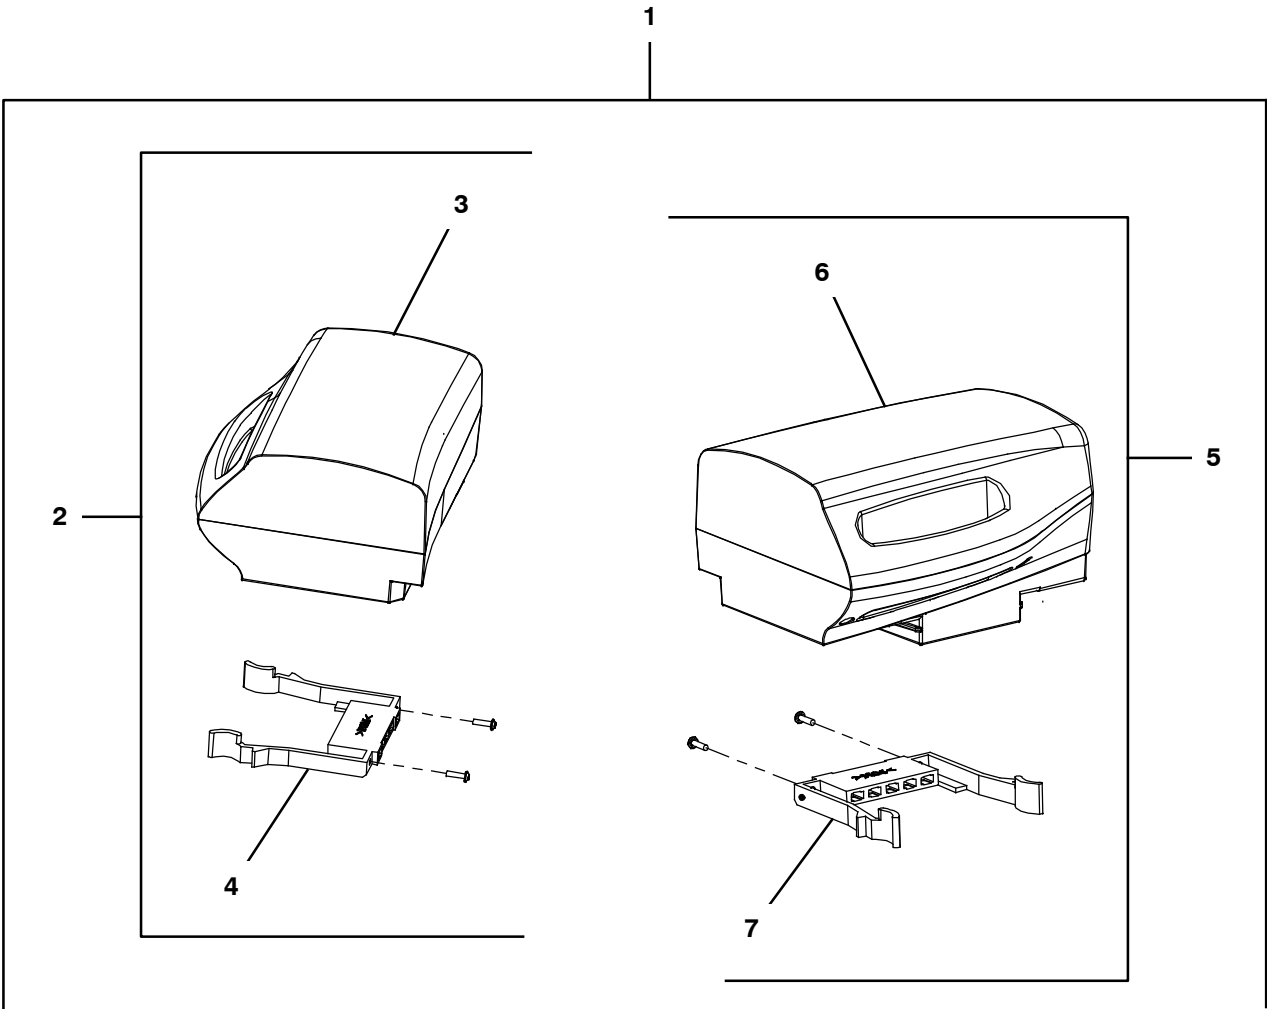

BATTERY PACK ASSEMBLY

	Ref.	Part No.	Serial Number	Description	Qty.
▽	1	1237733	(630000-	) Battery Kit, [Xxl I- Mop Left & Right]	1
▲▽	2	N/A	(630000-	) Battery, Pack, Rh [Xxl]	1
▲▲	3	N/A	(630000-	) Battery Pack Gray [Right]	1
▲▲	4	1232598	(630000-	) Connector, Bat, Fem, Rh (Color: Gray)	1
▲▽	5	N/A	(630000-	) Battery, Pack, Lh [Xxl]	1
▲▲	6	N/A	(630000-	) Battery Pack Blue [Left]	1
▲▲	7	1232545	(630000-	) Connector, Bat, Fem, Lh (Color: Blue)	1


▽ ASSEMBLY

▲ INCLUDED IN ASSEMBLY

N/A = NOT AVAILABLE SEPARATELY - MUST ORDER ASSEMBLY (▽)

BATTERY CHARGER ASSEMBLY

355580

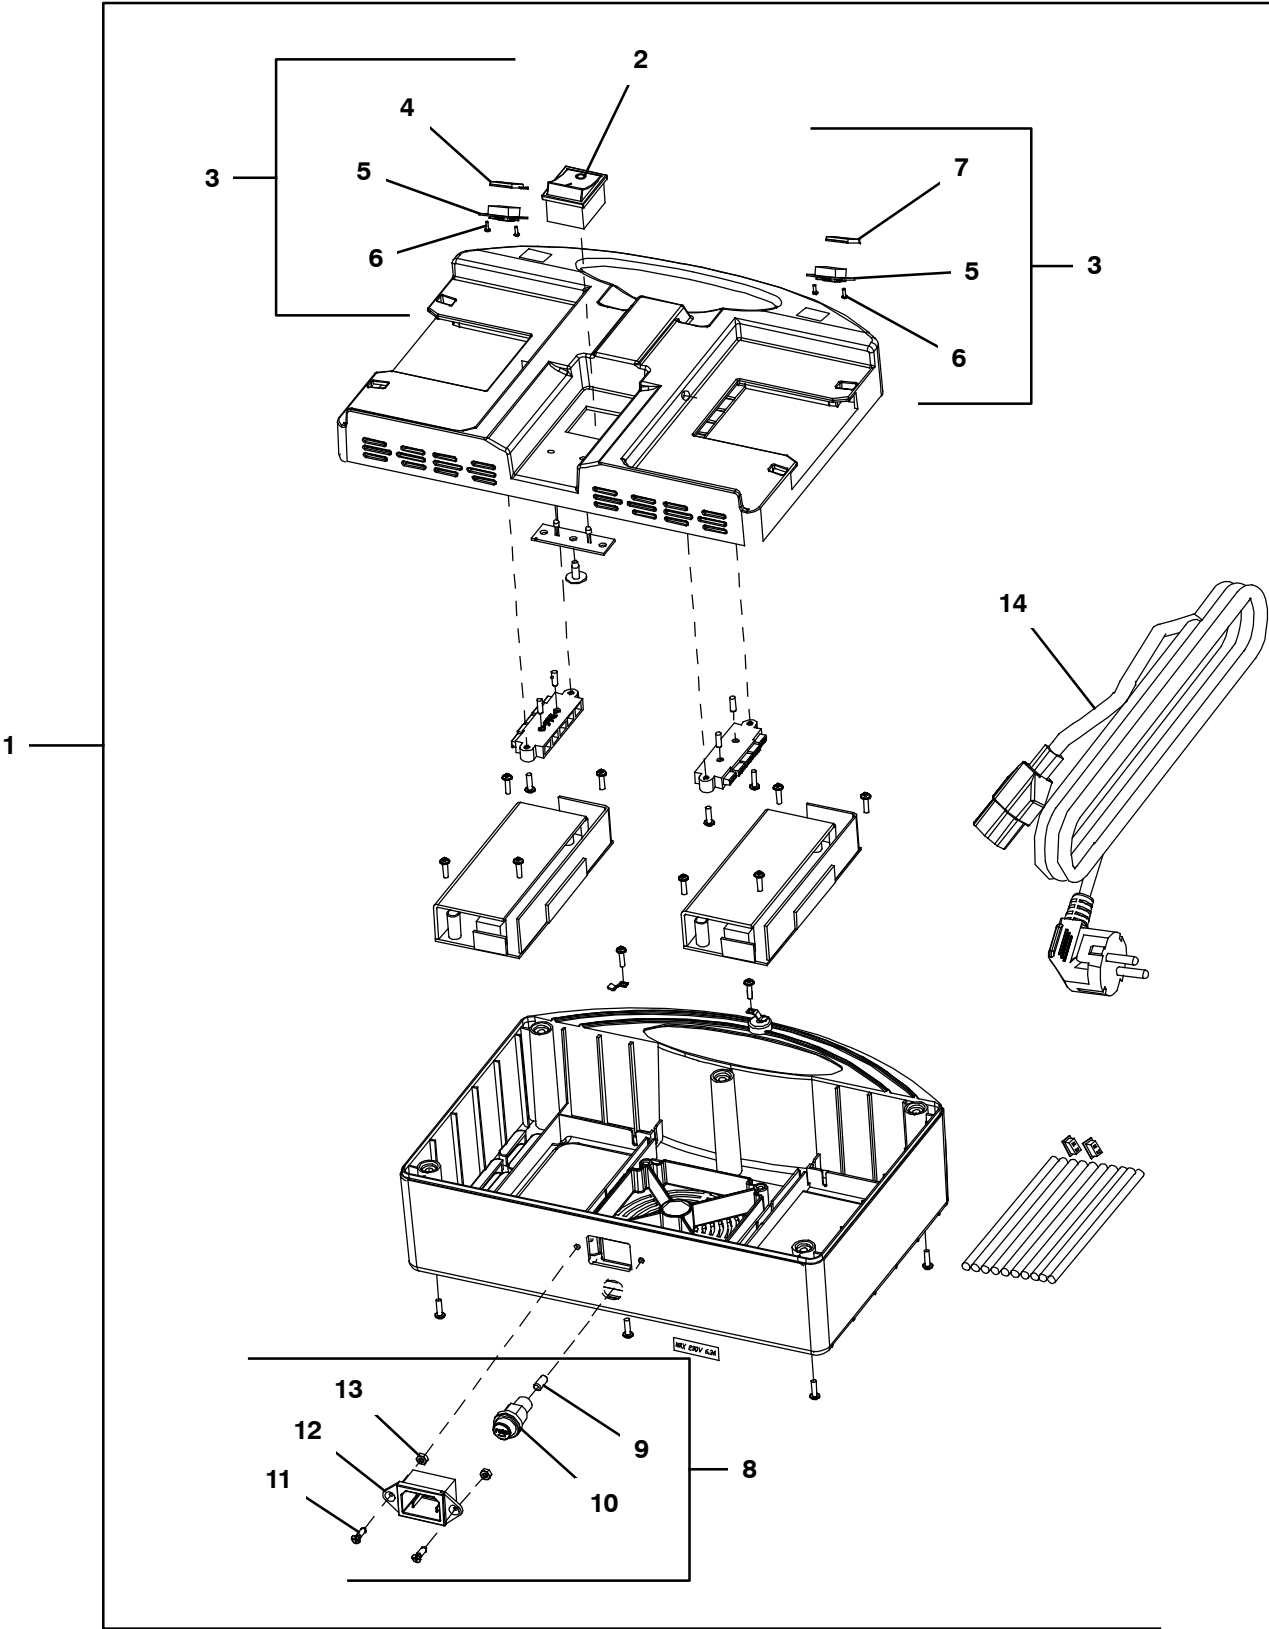

BATTERY CHARGER ASSEMBLY

	Ref.	Part No.	Serial Number	Description	Qty.
▽	1	1250527	(630000-	) Charger, Bat (Plus model 3pin)	1
▲	2	1232564	(630000-	) Switch, Chrgr	1
▲▽	3	1232712	(630000-	) Light, Voltage	1
▲▲	4	N/A	(630000-	) Transparent Cover Voltage Display Right	1
▲▲	5	N/A	(630000-	) Voltage Display With Percentage	2
▲▲	6	N/A	(630000-	) Screw M2x5 Cross Head Self Tapping	4
▲▲	7	N/A	(630000-	) Transparent Cover Voltage Display Left	1
▲▽	8	1232713	(630000-	) Receptacle Kit, Chrgr	1
▲▲	9	N/A	(630000-	) Fuse 6.3a	1
▲▲	10	N/A	(630000-	) Fuse 6.3a Base	1
▲▲	11	N/A	(630000-	) Countersunk Screw M3x15	2
▲▲	12	N/A	(630000-	) Recept Inlet 3p + Two Screw Holes Cb 3pin	1
▲▲	13	N/A	(630000-	) Nut M3 Nylon	2
▲	14	1232546	(630000-	) Cord, Power (UI 3 Pin) (Standard)	1
	14	1233924	(630000-	) Cord, Power [UI 3 Pin, 11 Meters Lg] (Optional)	1


▽ ASSEMBLY

▲ INCLUDED IN ASSEMBLY

N/A = NOT AVAILABLE SEPARATELY - MUST ORDER ASSEMBLY (▽)

WALL CHARGERS (OPTION)

355683

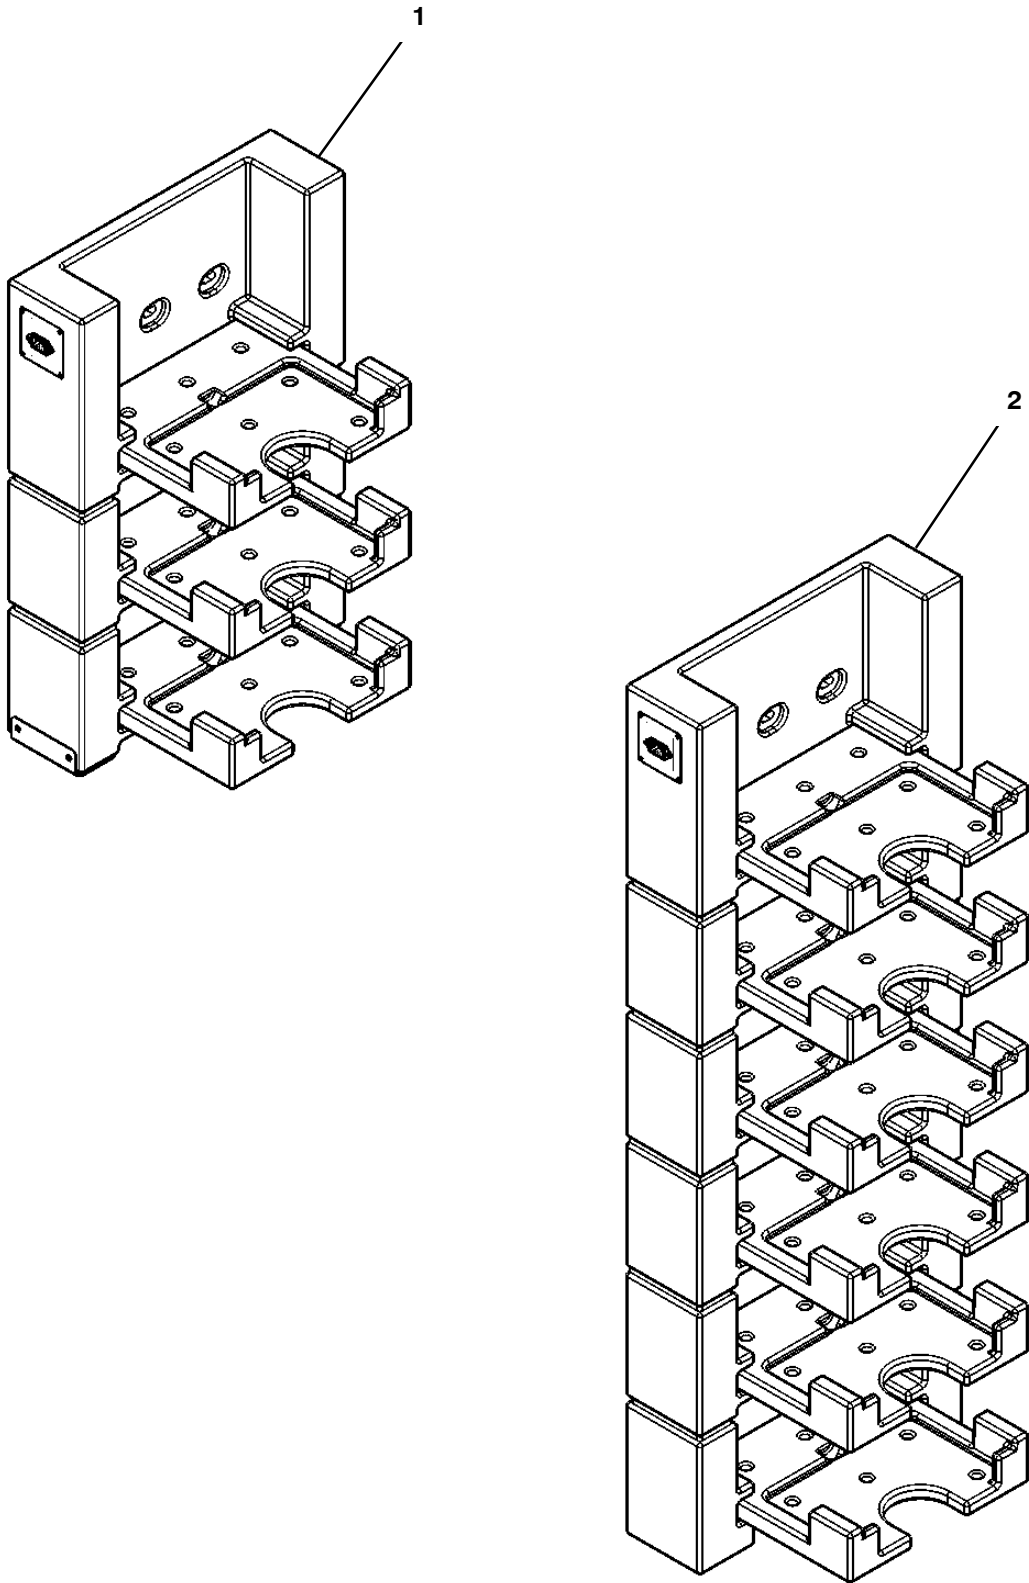

WALL CHARGERS (OPTION)

Ref.	Part No.	Serial Number	Description	Qty.
1	1232094	(630000-	) Charger, Wall [I- Mop 3 Layer]	1
2	1232058	(630000-	) Charger, Wall [I- Mop 6 Layer]	1

ELECTRICAL DIAGRAM

